
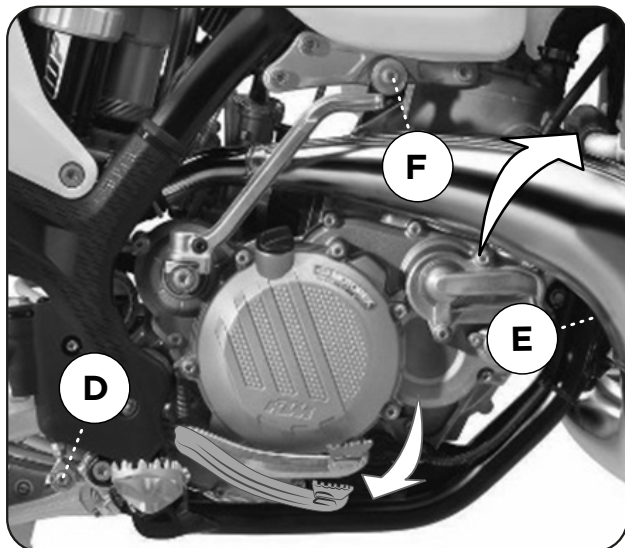


COD. 500006081


**A** - (1 pcs)**B** - (1 pcs)**C** - (7 pcs)

**1 - To mount the X-Power, begin by unscrewing the D bolt and lowering the rear brake pedal. Unscrew the exhaust pipe bolts E and F and rotate the exhaust pipe upward.**  
 1 - Per facilitare il montaggio del X-Power svitare la vite D del pedale e abbassarlo. Svitare le viti E/F e far ruotare la marmitta verso l'alto.

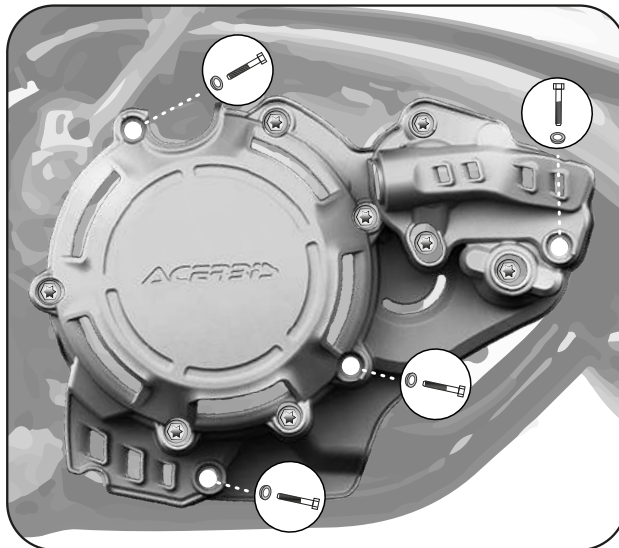

**2 - Remove 4 OEM clutch cover bolts exactly as indicated in the image above. Attach the X-Power clutch cover utilizing the 4 OEM bolts and 4 of the included C bushings and then tighten to the manufacturers suggested torque settings as indicated in the owners manual. Re-install the rear brake bolt D as well as the exhaust pipe bolts E and F and tighten them to the manufacturers suggested torque settings.**

2 - Rimuovere le 4 viti originali indicate in figura. Montare la protezione frizione X-Power con le viti originali e le 4 boccole C. Riposizionare il pedale, la marmitta, e riavvitare le viti D/E/F. Coppia di chiusura come riportato su manuale moto.

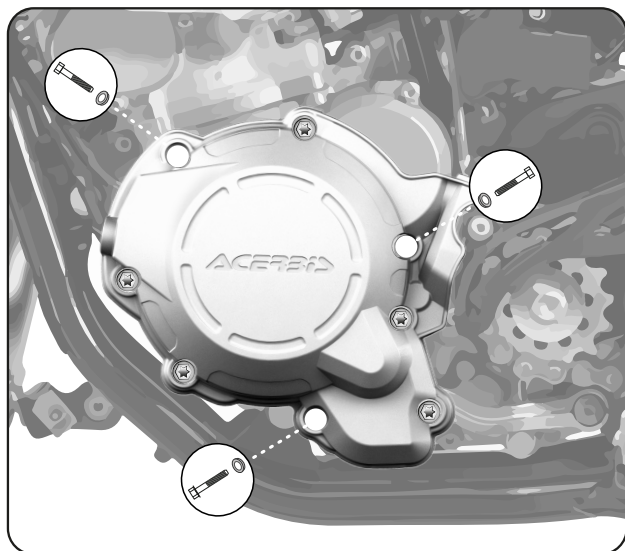

**3 - Remove 3 OEM ignition cover bolts exactly as indicated in the image above. Attach the X-Power ignition cover with the remaining 3 C bushings and the 3 stock ignition cover bolts and tighten to the OEM torque settings in the owners manual.**

3 - Rimuovere le 3 viti originali indicate in figura. Montare la protezione accensione X-Power con le viti originali e le 3 boccole C. Coppia di chiusura come riportato su manuale moto.

**WARNING!**

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.