




MANUAL ENCODER

Parts Included:

- 1 Rotary Controller
- 4 6" Cable Ties
- 1 Y-Harness
- 1 Dielectric Grease Packet
- 1 Switch Adhesive
- 2 Y-Splitters

Installation Instructions:

1. Park on a level surface and shut off the bike.
2. Lay cloth over fender to protect painted surfaces.
3. Remove windshield and outer fairing per your service manual (typically 4 inner screws on fairing, 3 windshield screws on front, and unplug headlight).
4. Locate Harley-Davidson accessory plug on fairing and remove empty click-in plug if in place.
5. Plug **Ciro Manual Encoder** into accessory power using supplied y-adaptor if required.

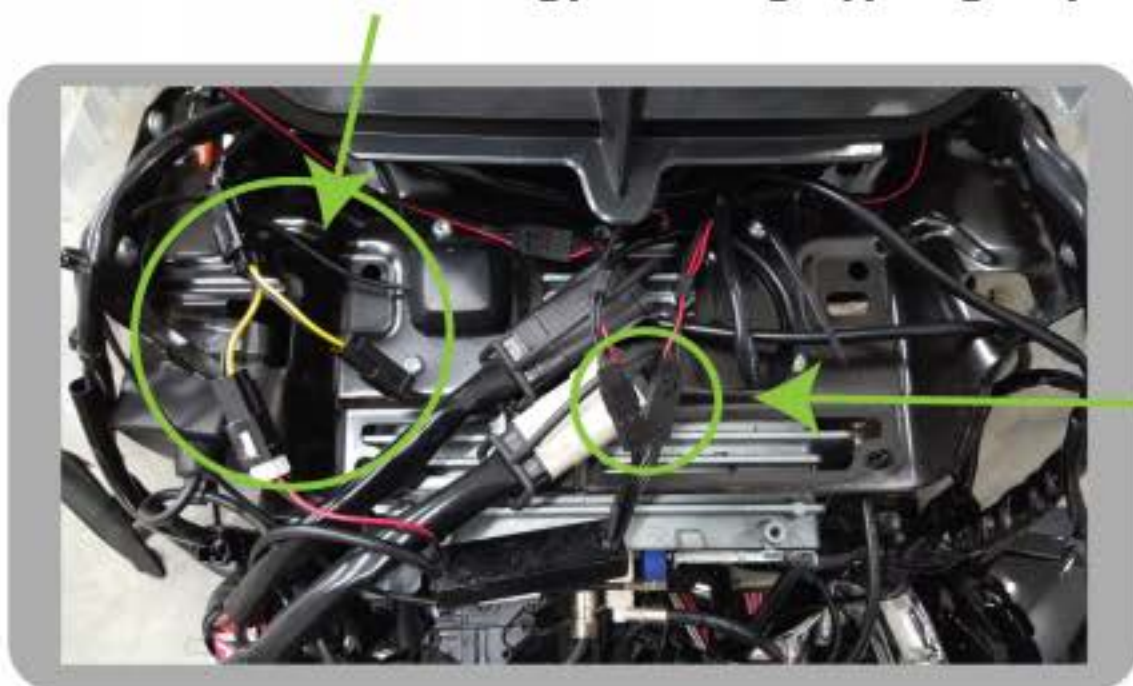

**Connect
Lighting**

6. Secure encoder into position with supplied cable ties.
7. Connect lighting accessory to encoder.
8. Run dial cord down to suitable position and secure with a screw, cable ties, or adhesive included. Lower right fairing is one recommended location for easy use.
9. Power on to test before reinstalling fairing.

How to Operate:

***Push controller knob to change mode and twist to change function. There are 6 modes.**

1. **Low Brightness** - turn knob for 21 different color choices.
2. **Medium Brightness** - turn knob for 21 different color choices.
3. **High Brightness** - turn knob for 21 different color choices (color chosen will be used on the remainder of the modes until changed again in mode 1, 2 or 3).
4. **Flash/Strobe** - turn knob to change speed of flashing lights.
5. **Breathe** - turn knob to change speed of breath. This mode will go through all 21 color choices.
6. **Off**

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All **Ciro** products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro products are designed and manufactured under very strict quality control. **Ciro** products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Ciro will not be liable for any consequential and incidental damages, including labor, or non-**Ciro** products.

Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM