




DASH ACCENT

Parts Included:

- 1 Dash Panel Accent

Installation Instructions:

1. Park on a level surface and shut off the bike.
2. Lay cloth over fender to protect painted surfaces.
3. Remove windshield and outer fairing per your service manual (typically 4 inner screws on fairing, 3 windshield screws on front, and unplug headlight).
4. Remove vent.

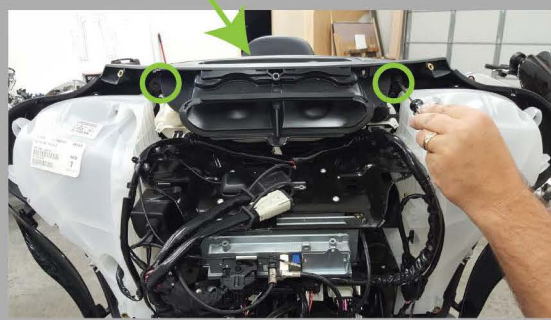

5. Drill 3/16" hole between center windshield bolt moulding.

6. File hole until large enough to fit connector through.



7. Use ammonia-based glass cleaner to wipe around dash. A clean surface ensures better adhesion.

8. Dry-fit Giro Dash Accent to find best position.

9. Temporarily holding dash accent in position, use painter's tape to mark correct alignment. Use a knife to make a clean cut on tape between the dash accent and fairing. This step will help you align dash accent once adhesive backing is removed.

10. Route wire through hole and test light function.

11. Activate adhesive by rubbing with fingernail. Remove adhesive backing and place dash accent in alignment with previous painter's tape mark.



12. Press and hold firmly for 60 seconds. Adhesive fully cures within 24 hours.

13. Reinstall vent, fairing, and windshield.

***Must also purchase and install Manual Encoder (part #42000) if a Giro light kit is not already installed.**

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure. Giro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products. Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM