



BAT BLADES® '96-'05


Parts Included:

- 1 Right Bat Blade
- 1 Left Bat Blade
- 1 Turn Signal Adapter
- 1 Dielectric Grease Packet
- 6 6" Cable Ties

Installation Instructions:

1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.
2. Use an ammonia-based glass cleaner to remove any wax or contaminants on the fairing where Bat Blades will be installed.
3. Locate small R and L on each Bat Blade to determine right and left side.
4. Align wire end of strip to bottom of fairing and temporarily hold strip in place with painter's tape. Once both Bat Blades are in place, step back and be sure that they are evenly placed. Once you are satisfied with placement, put a small piece of tape at the top of each strip on the fairing. This tape marker will ensure proper placement once adhesive backing is removed.
5. Remove adhesive backing and align strip according to your painter's tape mark. Press and hold firmly for 60 seconds. Adhesive fully cures within 24 hours.
6. Remove outer fairing and set on a clean, non-abrasive surface.

7. Locate and unplug six pin turn signal adapter. Apply a small amount of dielectric grease to connector, then install supplied turn signal adapter at that location.

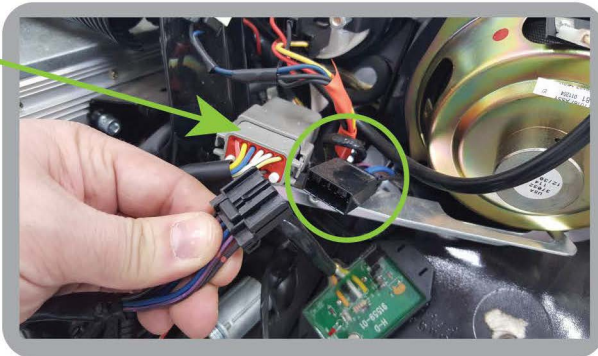

8. Run connector containing brown wire to right side of motorcycle. Secure harness with cable ties where needed.
9. With Bat Blades in place, reinstall outer fairing. Be sure to plug in headlight, right and left Bat Blades, and any other accessories previously disconnected. Right Bat Blade connects to brown wire and left Bat Blade connects to violet wire. Apply a small amount of dielectric grease at connectors. Tuck all wires inside of fairing.
10. Turn on power to verify that lights are functioning correctly.
11. Reinstall outer fairing per your service manual specifications.

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure. Giro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products. Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM