

FEEL THE HEAT!

Harness Bar for Kawasaki Teryx 4 Part # 14-4800 Kawasaki Teryx 4 Black

Congratulations on the purchase of the DragonFire Harness Bar for the Kawasaki Teryx 4. Properly installed harnesses greatly improve the enjoyment of all sport riding trips by allowing the driver and riders to focus on their surroundings, not holding themselves upright. DragonFire takes pride in designing a harness bar optimized for maximum comfort and security so you can pay attention to the things that matter most, the adventure at hand. Be sure to check out the full line of DragonFire Accessories for your Kawasaki vehicle at your local authorized dealer or online at <http://www.DragonFireRacing.com>

This harness bar may impede use of the optional factory cargo box.

WARNING

- Read and understand these instructions before installing product
- Do not use product if there are any signs of damage
- Injury can result from rollover, use this product with caution
- If rollover occurs, inspect for damage and replace if necessary

Tools Required

14mm Socket or Wrench
3/4" Socket and Wrench
Ratchet

Disclaimer


Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

Step 1: Place vehicle on a flat and level surface. Place gear selector in "Park" and remove keys from the ignition.

Step 2: Place harness bar on a flat surface and install the supplied harness mounting tabs with supplied 1/2" diameter hardware. Make sure to place a washer under the bolt head and under the nut on each bolt and notate the tab placement in **Figure A**.

Step 3: With tabs installed, position them evenly with a small gap between as shown in **Figure B**. With tabs in the desired location, tighten the hardware to **119 ft-lbs**.

Step 4: Locate and remove four (4) bolts on lower half of factory cage cross brace. (Figure C) This hardware will not be reused.

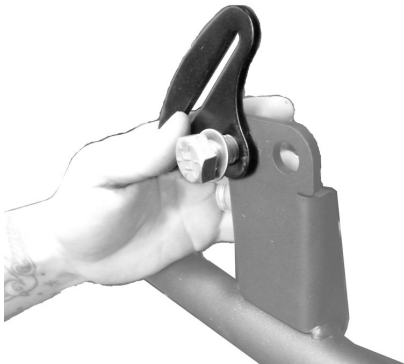

A



B



C



Step 5: Place harness bar in vehicle with harness loops on the top side and insert supplied M10 hardware. (Figure D) Torque hardware to value provided in the factory service manual.

Step 6: This completes installation. Time to ride and enjoy!

ProTip: Periodically check all hardware and re-tighten if needed.

For further assistance, please contact your authorized DragonFire dealer.



Hardware List				
QTY	SIZE	LENGTH	TYPE	STEP USED
4	1/2"	1.5"	Hex Head Bolt - Grade 8	1
4	1/2"	-	Nylon Lock Nut - Grade 8	1
8	1/2"	-	SAE Flat Washer (Small)	1
4	M10	20mm	Flange Head Bolt - Class 10.9	6