

**Q400.001**  
**1987-2005 Yamaha**  
**Banshee**  
**Stage 2**

**Stage 2**

For mildly tuned machines with the airbox  
intake snorkel removed, K&N air filter and a full  
FMF exhaust system.  
K&N Filter # YA-3502

<b><i>Parts List</i></b>		
2	Main Jet	DXP270
2	Main Jet	DXP280
2	Main Jet	DXP340
2	Fuel Needle	DNO305
2	Adjusting Washers	DW0001
2	E-Clips	DE0001

## STAGE TWO INSTRUCTIONS

Q400.001

1. Unscrew the carb tops. Disconnect throttle cables and remove the slides. Remove needle retainers and stock needles(Fig.A).
2. Install Dynojet needles on groove #3 for applications below 5000 feet, groove #2 for above 5000 feet. The Dynojet washers are for half step adjustments and do not need to be installed at this time.
3. Remove stock main jets and replace with Dynojet main jets provided. Use the DXP280 for applications below 3000ft. Use the DXP270 for applications above 3000ft. The DXP340 is for use with modified motors. Be sure that the jets you are changing are the main jets.
4. Locate the Air Screws (Fig.C). Using a flat blade screwdriver, turn the screws clockwise until it seats, then turn out 1.5 turns .

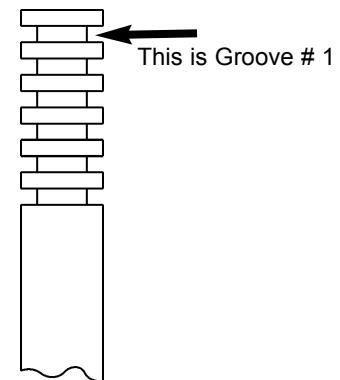


Fig.A



Fig.B

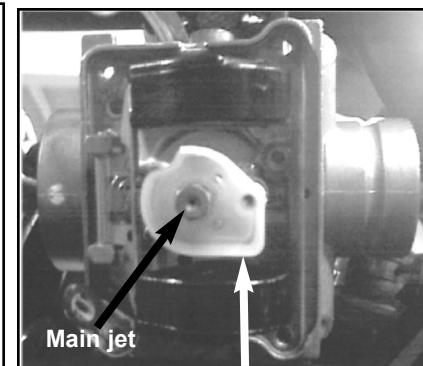


Fig.C

