

ESRM-2

exhaust servo removal module

To install the ESRM-2 first locate your stock servo motor. The servo motor will be under the tail section just forward of the rear shock.


Unplug the stock wiring harness from the servo motor.

Remove the servo motor from the motorcycle.

Plug the Dynojet ESRM-2 into the stock wiring harness and tie the wiring harness up such that it does not come into contact with any hot or moving parts.

Dynojet

www.dynojet.com

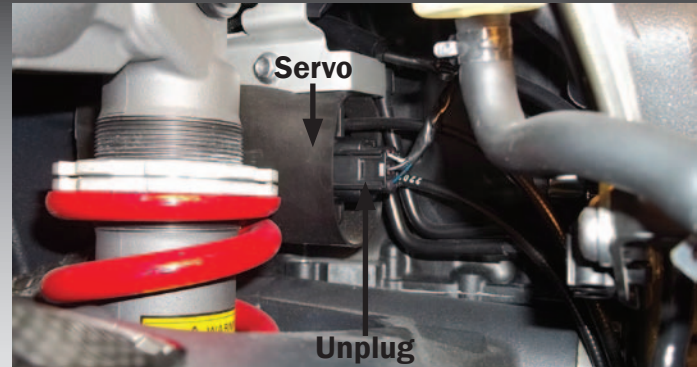

The ESRM-2 fits the 2013-2014 Triumph 675