



## MASTER CYLINDER COVER INSTRUCTIONS

### For technical support contact Joker Machine

2245 Kiowa Blvd N. Ste. 100, Lake Havasu City, AZ 86403  
PHONE: 909-596-9690, FAX: 909-596-9693  
sales@jokermachine.com, www.jokermachine.com

Tools Needed  
3/32 Hex Driver

### Installation


For non-sight glass applications, the clear plastic plug must be left in existing gasket, otherwise leaking will occur. Place top cover over sight glass & gasket and install as normal.

### Note:


Some front brake master cylinders may require the use of an aftermarket gasket without sight glass




8-32 Button Head Screw



Front Master Cylinder

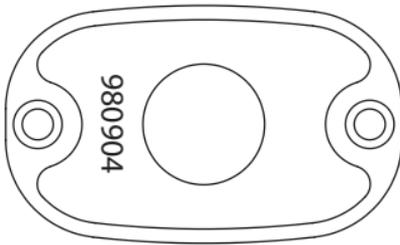

Rear Master Cylinder



Gasket with Sight Glass