



Thank you for purchasing our product. Before installing/operating the product, read the instructions carefully and retain them for future reference.

⚠ Attention!

- For installation, follow the steps described. Any damage caused by wrong installation shall be imputed to the users.
- Do not disassemble or change any parts. Opening and disassembling this unit will void any warranty.
- Maintenance and repairs should be executed by our professionals only.

NOTE

⚠ Some procedures must be followed to avoid damages to the product.

⚠ **WARNING!** Certain procedure must be followed to avoid damages to yourself, to the vehicle or to others.

1-1 ACCESSORY

1 AIR FILTER COVER




1-2 Optional Accessories


1 CYLINDER



2 THROTTLE BODY



3 INTAKE MANIFOLD X1




4 CONNECTING TUBE



5 AIR FILTER



2 INSTALLATION INSTRUCTIONS


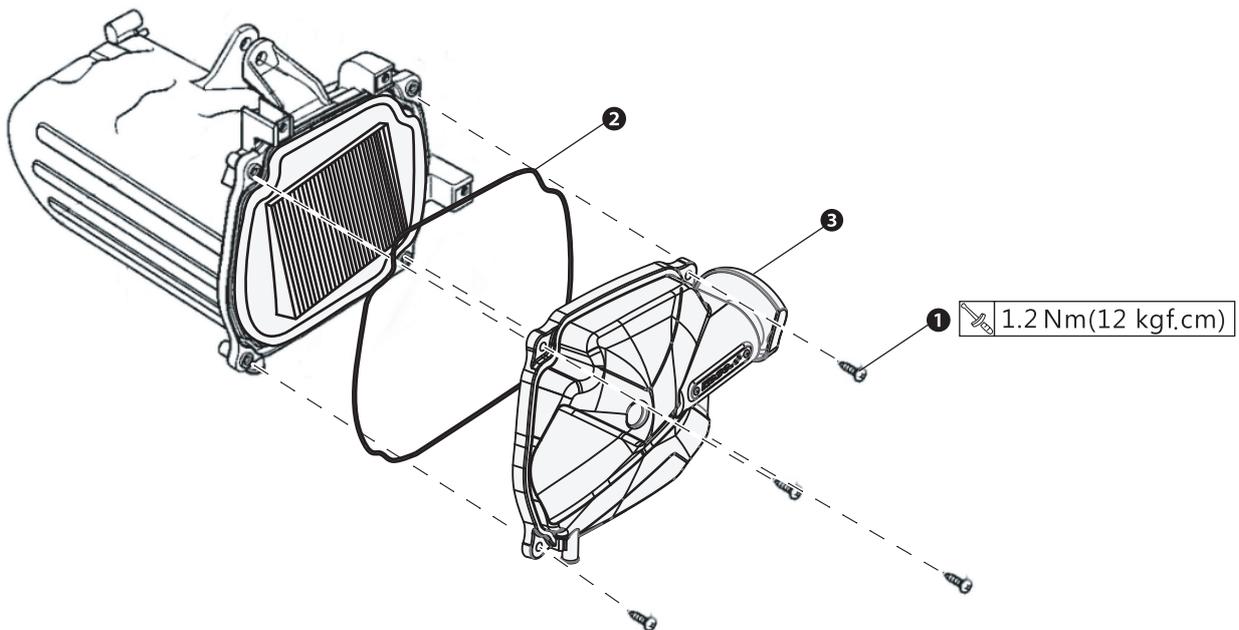


Proceed as follows

1. Use appropriate tools to loosen ① screws x4, air filter cover.
2. Install the ② sealing ring on the ③ KOSO air filter cover(accessory 1).
3. Place the ③ KOSO air filter cover in the correct position and use appropriate tools to lock the air filter cover.

⚠ **CAUTION!** If the bike falls down or has a fuel leak, clean up the fuel absorbed by the air filter (warning: Fuel leak may cause fire when starting the engine).

3 DYNO TEST CHART

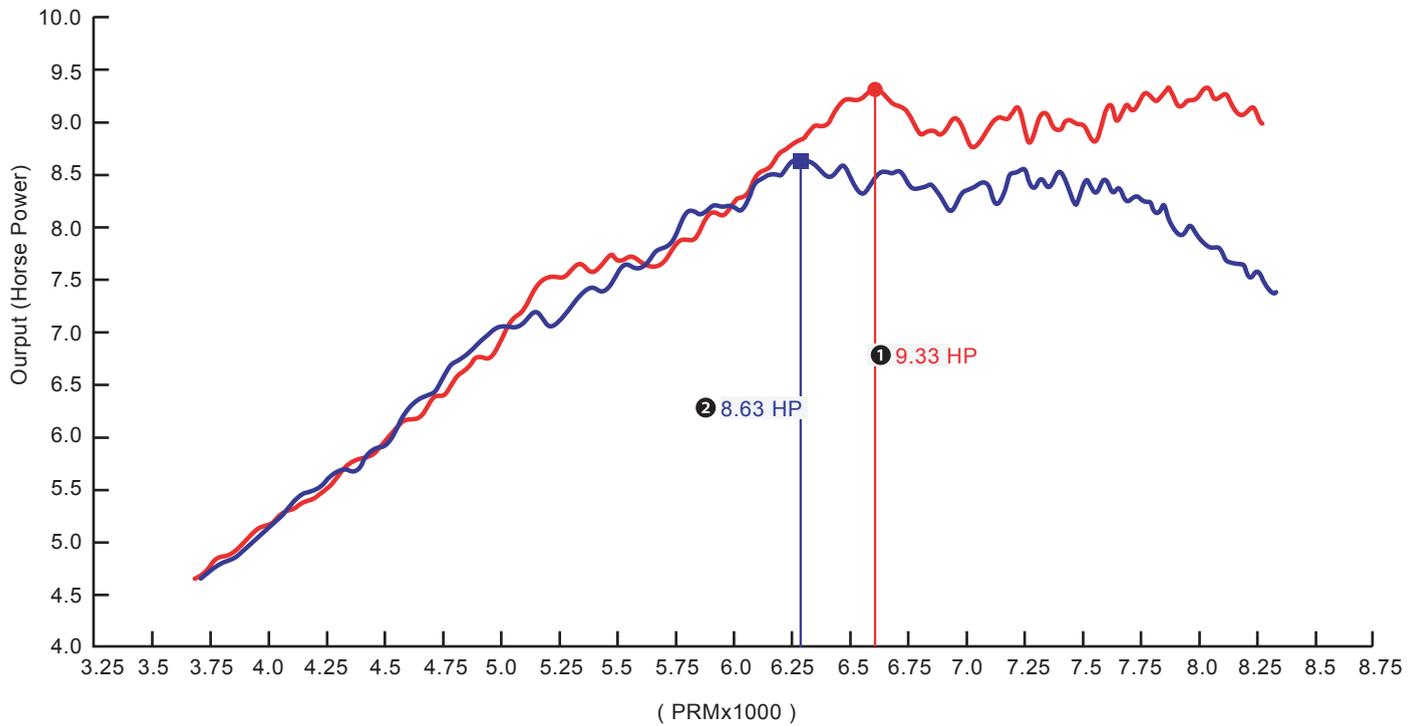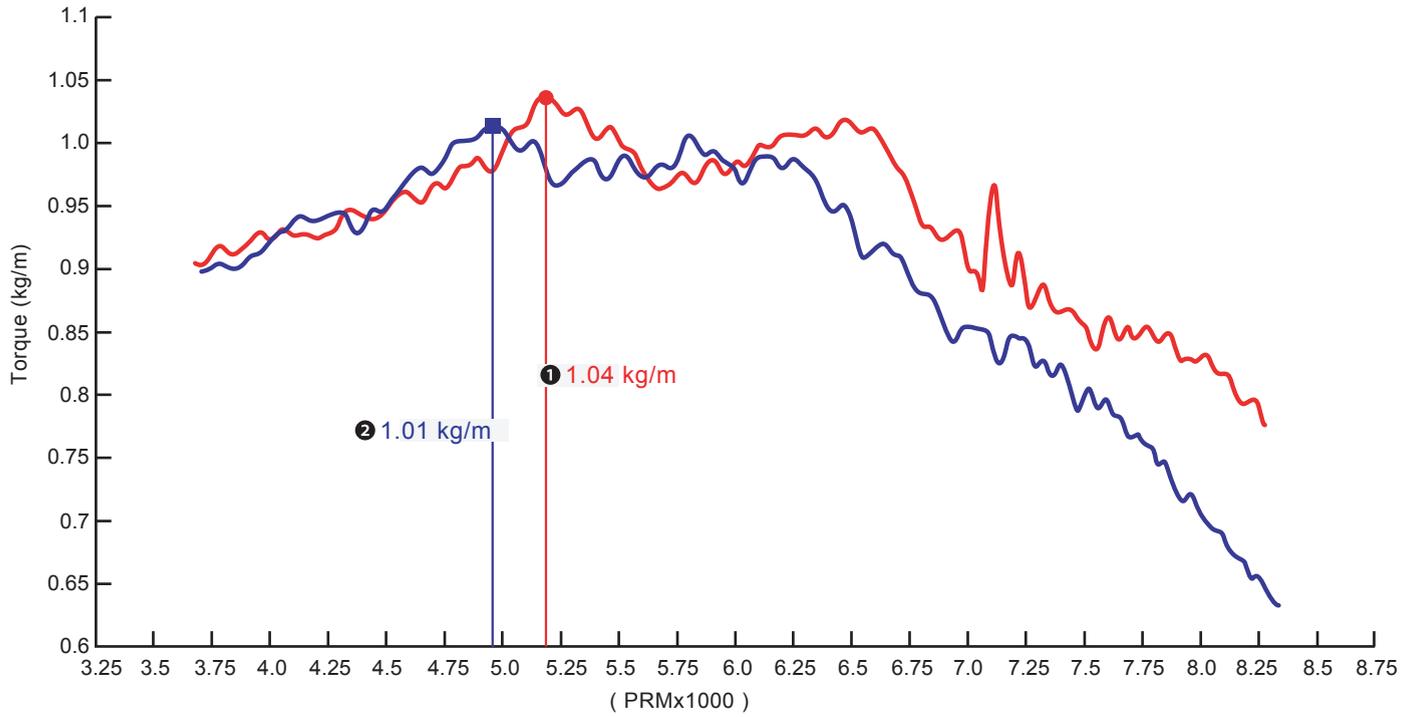

- NOTE 1** KOSO Intake+KOSO Throttle body+KOSO Air cleaner box connecting tube+KOSO Air filter cover
- NOTE 2** STD
- NOTE** Test results vary with testing environment and weather. This test chart is for reference only.