



INSTALLATION

HEEL BOSS for EASY BRAKING

4065

PARTS INCLUDED

- 1 Heel Boss Assembly
- 1 Hardware Kit Containing:
 - 1 Long Spacer
 - 2 Short Spacers
 - 2 M8-1.25 X 30mm Button Socket Cap Screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in potential injury.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Set of Metric Hex Wrenches, Set of Metric Hex Sockets, Torque Wrench (FT/LBS)

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

WARNING

YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

-cont.-

4065-21GL-1012



CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



kuryakyn.com

STEP 2 Using a hex wrench, remove the two socket screws that hold your brake side peg mount and remove the mount. PIC 1 If the motorcycle is equipped with Küryakyn Driver's Floorboards, remove the two socket screws that hold the brake side board on and remove the board. PIC 2 Set this hardware aside, it will not be reused.

STEP 3 Insert one of the supplied M8 button socket cap screws through each hole in the Heel Boss. If using the OEM peg mounts, place the included long spacer over the front cap screw and one of the short spacers over the rear cap screw. PIC 3 If using Küryakyn Chrome Driver peg mounts, place one of the included short spacers over each cap screw. PIC 4 If using Küryakyn Driver's Floorboards, you will not use the included spacers. PIC 5

STEP 4 Place the Heel Boss, with spacers (if needed) on the cap screws, through the holes in the peg or floorboard mount. The spacers will go between the Heel Boss and the mount. Place a drop of blue thread locker on the threads of each cap screw. Attach the Heel Boss/ mount assembly to the motorcycle by threading the M8 cap screws into the OEM mounting location. **Tighten to 20 FT/LBS.**



NOTE: The Heel Boss changes the position of your foot while braking. Expect a new or different feel when braking.

WARNING FAMILIARIZE YOURSELF WITH THE POSITION OF THE HEEL BOSS BEFORE OPERATING THE MOTORCYCLE ON PUBLIC STREETS, ROADS, OR HIGHWAYS. FAILURE TO BE COMPLETELY COMFORTABLE WITH THE USE OF THE HEEL BOSS COULD RESULT IN LOSS OF CONTROL CAUSING SERIOUS INJURY OR DEATH.

WARNING THE HEEL BOSS IS DESIGNED AS A HEEL REST TO BE USED WHEN BRAKING ONLY. IT IS NOT MEANT TO BE USED AS AN ALTERNATE FOOT REST POSITION, OR TO SUPPORT THE WEIGHT OF THE DRIVER. MISUSE OF THE HEEL BOSS COULD CAUSE LOSS OF CONTROL, RESULTING IN SERIOUS INJURY OR DEATH.


CAUTION Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

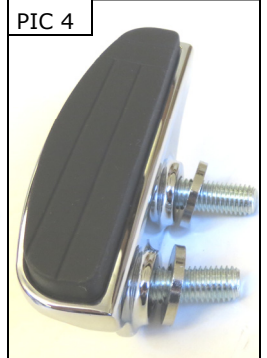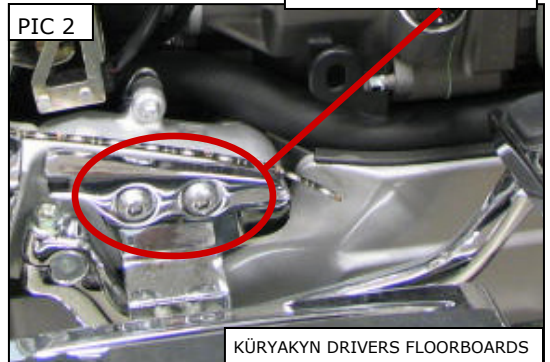

LONG SPACER ON FRONT-SHORT SPACER ON REAR FOR OEM PEG MOUNTS

TWO SHORT SPACERS FOR KÜRYAKYN PEG MOUNTS

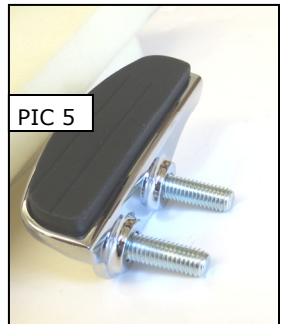

USE NO SPACERS FOR KÜRYAKYN DRIVERS FLOORBOARDS