



SIDE MOUNT FLAG HOLDER for H-D DRESSER

4208

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION

This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Side Mount American Flag Assembly with 18" Staff
- 1 9" x 14" P.O.W./M.I.A. Flag
- 1 9" x 14" Skull & Crossbones Flag
- 1 12" Round Threaded Chrome Staff
- 1 Installation Instructions


TOOLS SUGGESTED:

Set of Hex Wrenches, Set of Torx Wrenches, Set of Combination Wrenches, Medium Strength Loctite

NOTICE

This copy of installation instructions contains important information. Ensure that the end user receives this copy and is aware of its importance for future reference.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.
- STEP 2** Determine on which side the flag is to be mounted and remove that saddlebag.
- STEP 3** Remove the rearmost saddlebag guard clamp by removing the two Torx screws PIC 1

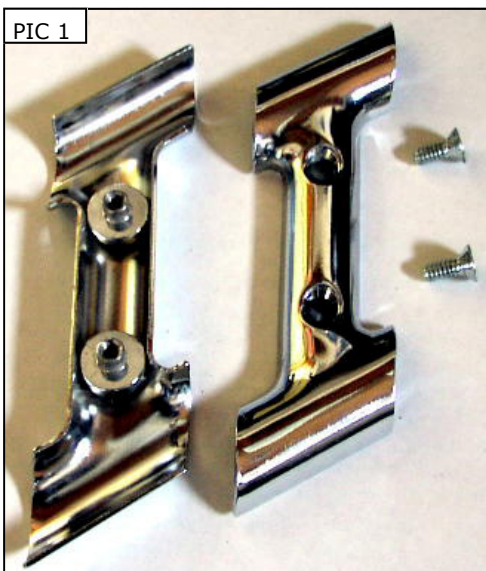

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



STEP 4

Using a Hex wrench, remove the 1/4"-20 socket head cap screw and separate the new clamp halves. Apply Threadlocker to the threads of the screw. Install the flag and clamp assembly in roughly the same location as the saddlebag guard clamp removed in **STEP 3**. Position the clamp as far back as possible so the staff does not interfere with operation of the saddlebag lid. The original saddlebag guard clamp will not be reinstalled.

NOTICE

Kuryakyn highly recommends the use of a medium strength Threadlocker on the threads of the staff and Spire Point End Cap. Disassemble the staff and End cap, apply Threadlocker to the threads and reassemble BEFORE riding the motorcycle. Refer to the steps below for disassembly procedures.

Determine the mounting location and orientation of the Flag Holder before fully tightening the fasteners. The Flag Holder may leave marks when tightened down.

CHANGING FLAGS OR STAFFS:

CHANGE THE FLAG

1. Slide the flag down the staff to expose the staff's "Flats" (PIC.2).
2. Use an open end wrench on the "Flats" to keep the staff from turning and remove the Spire Point End Cap with an open end wrench.
3. Exchange flags. Place a dab of blue thread locker on the threads and reinstall the Spire Point End Cap.

PIC 2



CHANGE THE STAFF

1. Slide the flag down the staff to expose the staff's "Flats" (PIC.2).
2. Use an open end wrench on the "Flats" to keep the staff from turning and remove the spire point end cap with an open end wrench.
3. Remove the flag.
4. While holding the mount assembly securely, use an open end wrench on the staff's "Flats" to unscrew staff (counter-clockwise).
5. Remove the retaining ring from the 18" staff after loosening the set screw with a Hex wrench.
6. Install retaining ring on the 12" staff and lightly tighten the set screw to hold it in place near the bottom of the staff.
7. Place a dab of blue thread locker on the threads and screw the 12" staff into the mount. Tighten securely with an open end wrench.
8. Install the flag of your choice and reinstall the spire point end cap. A dab of blue thread locker will help ensure the cap does not come loose.
9. Adjust the position of the retaining ring to hold the flag against the bottom of the spire point end cap.

PIC 3



STEP 5

Reinstall the saddlebag.



It is the installer's responsibility to ensure that there is adequate clearance between the Flag Holder and any painted surfaces. Kuryakyn is not responsible for any damage due to inadequate

NOTICE

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

Ride On!

PAGE
2

Ride On!