



ADJUSTABLE PASSENGER PEGS

4353

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Right Hand Adjustable Passenger Peg Mount
- 1 Left Hand Adjustable Passenger Peg Mount
- 2 Small ISO Pegs
- 2 Stop Bushings for Two Wheel Applications
- 1 Stop Bushing for Trike Applications-Right (Parking Brake) Side
- 1 Installation Instructions

TOOLS SUGGESTED:

Set of Hex Wrenches

NOTICE These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future reference.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Allow the engine and exhaust system to cool.

WARNING **INSTALLATION MAY REQUIRE CONTACT WITH THE EXHAUST SYSTEM. ENSURE THAT THE EXHAUST SYSTEM HAS FULLY COOLED BEFORE BEGINNING TO PREVENT INJURY.**

ADDITIONAL FITMENT: Also fits motorcycles equipped with H-D P/N's **50378-07A, 50378-07B, 50379-07A, 50379-07B, 53070-00A or 53070-00B Passenger floorboard mount kit.**

WARNING **THE FOLDING ARM IS INTENDED AS A FOOTREST AND IS NOT INTENDED TO BE USED FOR MOUNTING OR DISMOUNTING THE MOTORCYCLE OR TO SUPPORT THE FULL WEIGHT OF THE PASSENGER.**

NOTICE **Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.**

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn
454 County Road V V
Somerset, WI 54025-9031
Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.







STEP 2

Refer to PIC 1. Locate the Left and Right Adjustable Passenger Peg Mounts. Remove the six screws as shown; set the screws aside, they will be reused.

NOTE:

The Adjustable Passenger Peg mounts are labeled "RH" (RIGHT (BRAKE)-SIDE) and "LH" (LEFT (CLUTCH)-SIDE), respectively.

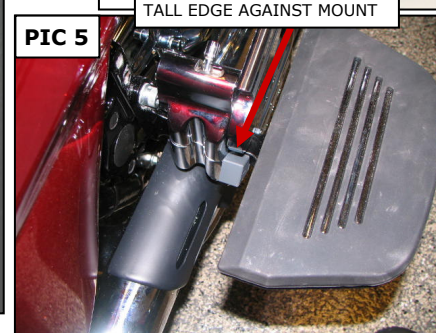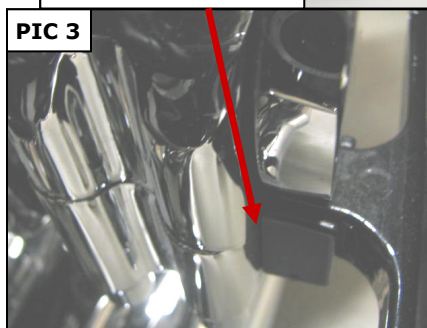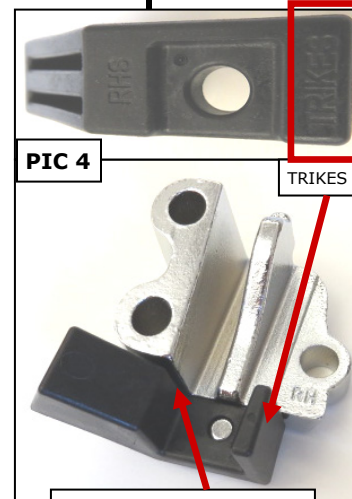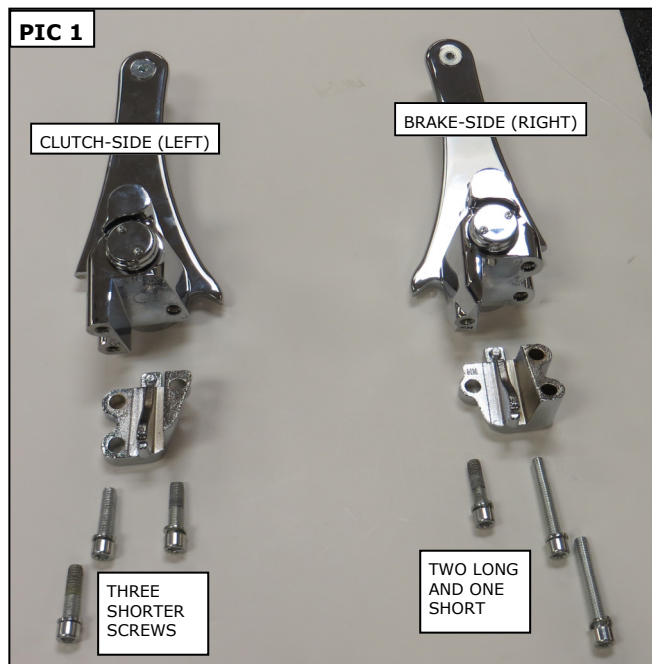

STEP 3

Typical Installation: Refer to PICs 2 and 3. Locate the included Stop Bushings; install them on the left and right bottom mount tabs. The tall edge of the Stop Bushing goes against the top mount/pivot arm assembly.

On '10-'14 trike applications: Refer to PICs 2 through 5. Locate the included Stop Bushing marked "TRIKES"; install it on the brake-side (right) bottom-mount; install one of the other Stop Bushings on the clutch-side (left) bottom mount; ensure the taller edge goes against the top mount/pivot arm assembly.

STEP 4

As shown in **PIC 6**, place the top mount/pivot arm assembly over the footboard support (with pivot arm facing outward). Check for proper clearance between the top mount/pivot arm assembly and the footboard.

STEP 5

As shown in **PIC 7**, secure the bottom mount to the top assembly with the screws removed in **STEP 2**. **The three shorter screws = clutch-side (left); the two long and one short screw = brake-side (right);**

tighten the fasteners evenly; do not over-tighten.

STEP 6


Install the included foot pegs on the pivot arms with the supplied fasteners. Leave loose for now.

STEP 7

Adjust the peg pads to the most comfortable position with the arm in the forward position. Tighten the fastener securing the peg to the arm.

STEP 8

To adjust the position of the pivot arm, move the locking knob out of the locked position and rotate the pivot arm to the desired position. Move the knob back into the locked position.

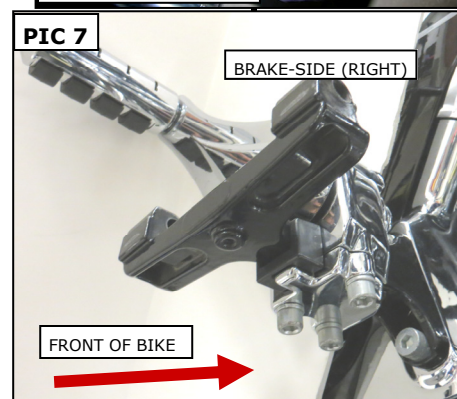

NOTICE

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

Ride On!