

## INSTALLATION INSTRUCTIONS

### RIDGEBACK BRAKE PEDAL FOR TOURING & TRIKE WITHOUT LOWERS, CHROME

9698

#### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

1	Brake Pedal	1	Hardware Kit, containing:
1	Brake Peg	1	1/4-20 X 0.5" Button Head Cap Screw
1	Brake Arm Cap	1	Cotter Pin
		1	5/16 Internal Lock Washer
		1	Hot Spots 5/16"
		1	5/16-24 X 1.5" Socket Head Cap Screw

#### YOU WILL ALSO NEED:

Hex wrench set, hex bit socket set, socket set, combination wrench set, grease, FT LBS (Nm) torque wrench, and needle nose pliers

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool. Remove main fuse.

**WARNING** THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

**WARNING** ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.


**WARNING** INSTALLATION MAY REQUIRE CONTACT WITH THE ENGINE AND EXHAUST SYSTEM; ENSURE THAT IT HAS FULLY COOLED BEFORE BEGINNING TO PREVENT INJURY.

**WARNING** BEFORE RIDING, ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH PROPER OPERATION OF THE MOTORCYCLE.

**STEP 2** Refer to PIC 2. Remove the brake-side (right) floorboard; loosen the front floorboard mount and rotate it until it is pointing toward the ground.

**STEP 3** Disconnect the engine guard.

**STEP 4** Refer to PIC 3. Remove the two screws securing the brake master cylinder assembly to the motorcycle; set the screws aside for now, they will be reinstalled.

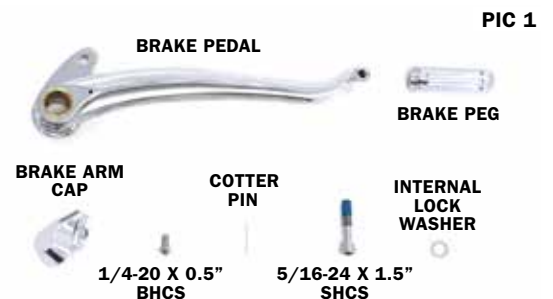

## INSTALLATION INSTRUCTIONS

### RIDGEBACK BRAKE PEDAL FOR TOURING & TRIKE WITHOUT LOWERS, CHROME


9698

-CONTINUED-

- STEP 5** Carefully move the master cylinder forward; do not move the assembly too far forward or damage will occur.
- STEP 6** Remove the nut, washer and O-ring from the existing brake pedal. Set the nut and washer aside, they will be reused.
- STEP 7** Carefully slide the brake pedal and master cylinder assembly outward to gain access to the cotter pin on the backside of the pedal.
- STEP 8** Refer to PIC 3. Remove the cotter pin, washer and pivot pin from the pedal. Set pivot pin aside, it will be reused.
- STEP 9** Rotate the brake pedal forward and slide it off the pivot shaft.
- STEP 10** Clean and re-grease the pivot shaft.
- STEP 11** Refer to PIC 4. Locate the provided Brake Pedal and cotter pin. Slide the Brake Pedal onto the shaft; secure it with the existing pivot pin, washer, and provided Cotter Pin. Bend the ends of the Cotter Pin.
- STEP 12** Secure the Pedal to the pivot shaft with the existing nut and washer; torque to 15-20 FT LBS (20.3-27.1 NM).
- STEP 13** Secure the master cylinder to the motorcycle with the existing screws; torque to 10.5-12.5 FT LBS (14.2-17 NM).
- STEP 14** Locate provided brake peg, socket head cap screw, and internal tooth washer.
- STEP 15** From the inside edge of the brake lever, thread the screw all the way through the lever. Place the washer over the screw.
- STEP 16** Thread the Brake Peg onto the screw; adjust the angle of the peg. Hold the peg and fully tighten the screw.
- STEP 17** Refer to PIC 5. Locate provided Brake Arm Cap, button head cap screw and hot spot. Align and fasten the cap over the pivot shaft, washer, and lock nut. Secure into place by inserting the screw into the front of the cap and tightening it. Insert the hot spot into the screw head.
- STEP 18** Reinstall the floorboard, engine guard, and main fuse.

#### NOTICE

IT IS THE END USER'S RESPONSIBILITY TO ENSURE THAT ALL FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST OR DAMAGED DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

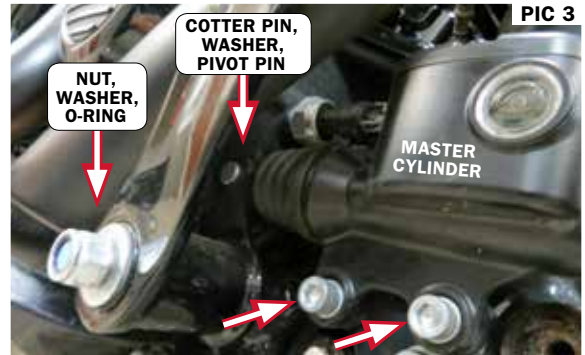

[KURYAKYN.COM](http://KURYAKYN.COM)

866 277 9598 | [INFO@KURYAKYN.COM](mailto:INFO@KURYAKYN.COM)

454 COUNTY ROAD VV SOMERSET, WI 54025





## INSTALLATION INSTRUCTIONS

### RIDGEBACK BRAKE PEDAL FOR TOURING & TRIKE WITHOUT LOWERS, CHROME

9698

-CONTINUED-

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)

**KURYAKYN.COM**

866 277 9598 | [INFO@KURYAKYN.COM](mailto:INFO@KURYAKYN.COM)

454 COUNTY ROAD VV SOMERSET, WI 54025

