

CRUSHER® MAVERICK PRO AIR CLEANER FOR INDIAN®, SATIN BLACK

9968

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | |
|-------------------------------------|---|
| 1 Air Cleaner Assembly, containing: | 1 Hardware Kit, containing: |
| 1 Cover | 2 M5 X .8 X 14MM Socket Head Cap Screw (SHCS) |
| 1 Pressure Plate | 2 M5 X .8 X 10MM Flat Head Cap Screw (FHCS) |
| 1 Air Filter | 2 M5 X .8 Button Head Cap Screw (BHCS) |
| 1 Back Plate | 3 M4 X .7 Flat Head Cap Screw (FHCS) |
| | 1 Cord Seal Plate |
| | 1 Foam Tube |
| | 1 Alcohol Pad (discard, not needed) |

YOU WILL ALSO NEED:

Metric Hex Keys, Metric Hex Bit Sockets, In-lbs (Nm) Torque Wrench, Blue Loctite

PICTURES SHOWN ARE OF THE CHROME PARTS. INSTALLATION OF THE BLACK PARTS WILL BE THE SAME.

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool. Remove main fuse.

STEP 2 Refer to PIC 1. Locate Air Cleaner Assembly. Dismantle assembly, and set all the pieces aside on a flat clean surface.



THE PERFORMANCE DIVISION OF KURYAKYN

CRUSHER® MAVERICK PRO AIR CLEANER FOR INDIAN®, SATIN BLACK

9968

-Continued-

STEP 3 Refer to PIC 2 and 3. Remove the existing air intake system; cover, retainer plate, throttle body, air box assembly, air box connector, and all fasteners. Set throttle body, mounting hardware, and throttle body o-rings aside as they will be reused.

Note: Refer to service manual for assistance.



STEP 4 Refer to PIC 4 and 5. Locate AC Back Plate. Locate the two (2) stock O-Rings that were removed in Step 3. Place the O-Rings around the hole where the throttle body will re-connect, one on the front (inside) and one on the back (outside) of the plate.

STEP 5 Refer to PIC 6 through 8. Align and connect the AC Back Plate with the breather hose. Feed the wiring harness through the hole in the lower rear corner of the back plate.

TIP: Lightly fasten the back plate to the motorcycle by using one of the OEM screws removed from the throttle body to help hold the back plate in place.

STEP 6 Refer to PIC 9. Locate foam tube. Wrap the foam tube around the wire harness. Place the foam wrapped wire in the gap located in the lower right corner of where the wire is feed through the back plate.

STEP 7 Refer to PIC 10. Locate Wire Cover and three (3) Flat Head Screws. Align and fasten cover to the lower rear corner of the back plate. Fully tighten hardware.

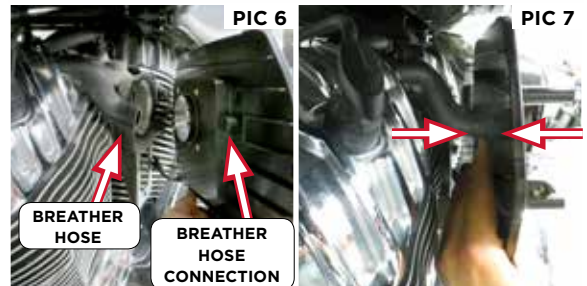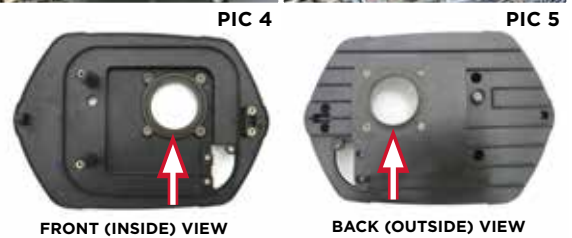

CRUSHER® MAVERICK PRO AIR CLEANER FOR INDIAN®, SATIN BLACK

9968

-Continued-

STEP 8 *Note: If you used an OEM screw to hold the back plate in place, remove it and use it for the reattachment of the throttle body in this step.*

Refer to PIC 11. Locate throttle body and mounting hardware that was removed in Step 3. Apply a small amount of blue loctite to each screw. Align and fasten the throttle body to the motorcycle. Fully tighten hardware.

**TORQUE VALUE FOR THROTTLE BODY SCREWS:
88.5 IN-LBS (119.99NM)**



STEP 9 Refer to PIC 12. Connect the wire harness to the throttle body, and clip-in the wire to the clamp located on the lower right corner of the throttle body.

STEP 10 Refer to PIC 13. Locate K&N Filter. Align and place filter over the throttle body; the filter should sit on the inside edge of the back plate.

STEP 11 Refer to PIC 14. Locate the Pressure Plate, two (2) M5 x .8 x 14MM Socket Head Cap Screws, and two (2) M8 x .8 x 10MM Flat Head Cap Screw. Align the fastening holes of the Pressure Plate with the Back Plate. Use the two M5 Socket Screws on the left (front) side of the pressure plate, and the two M5 Flat Screws on the right (rear) side of the pressure plate. Fully tighten hardware.

STEP 12 Refer to PIC 15 through 17. Locate the Air Cleaner Cover and two (2) M5 x .8 Button Head Cap Screws. Align the cover over the air cleaner assembly. Use the two M5 Button Screws to fasten the AC Cover to the Pressure Plate on the left (front) side and right (rear) side.

STEP 13 Reinstall main fuse.

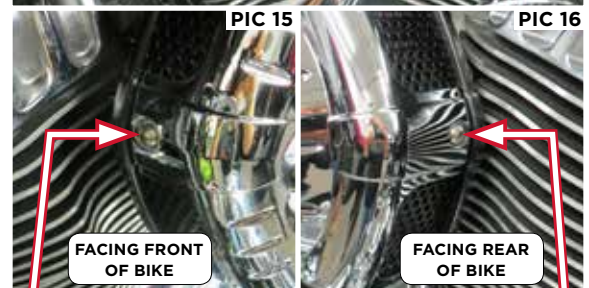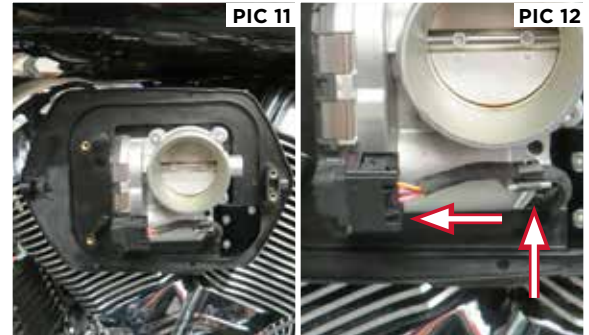

CRUSHER® MAVERICK PRO AIR CLEANER FOR INDIAN®, SATIN BLACK

9968

-Continued-

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



FINAL

LIMITED WARRANTY

Crusher warrants that any Crusher products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Crusher shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Crusher shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Crusher product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Crusher & a customer.
4. Crusher products are often intended for use in specific applications. Crusher makes no warranty if a product is used in applications other than intended.
5. Crusher electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Crusher products will be warranted for defects in materials & workmanship for 3 years from the date of purchase where as all other components shall be warranted for one (1) year.
6. Exhaust systems are warranted for manufacturing defects only. There is no warranty on exhaust pipes & mufflers with regard to any discoloration. Discoloration or "blue-ing" is caused by tuning characteristics, exhaust timing, carburetor jetting, overheating, etc. & is not caused by defective manufacturing.
7. Crusher makes no warranty of any kind in regard to other manufacturer's products distributed by Crusher. Crusher will pass on all warranties made by the manufacturer & where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.
8. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Crusher warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Crusher retailer.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

RETURN INSTRUCTIONS

Contact one of our prompt, courteous Customer Service representatives toll free at 866-295-5759. Be sure to have the following information available when you call:

- Name
 - Part number(s) to be returned
 - Copy of original invoice
 - Reason for return
1. Obtain R.M.A. number which shall remain active & valid for 60 days.(Important: Issuance of R.M.A. does not represent an authorized credit.)
 2. Carefully package merchandise to avoid damage during shipment. Depending on its condition, original packaging may not be sufficient.
 3. Ship only those items for which the R.M.A. has been issued.
 4. Write the R.M.A. number prominently on the outside of package.
 5. Ship package freight PREPAID (C.O.D.s will not be accepted) to:
Kuryakyn 454 County Road V V Somerset, WI 54025

EMISSIONS NOTICE

The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

©2016 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

CRUSHER, CRUSHER logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

THE PERFORMANCE DIVISION OF KURYAKYN

INFO@CRUSHERPERFORMANCE.COM | 866 295 5759 | CRUSHERPERFORMANCE.COM 