

INSTALLATION GUIDE

PART: 1311-0154



WARRANTY

All Legend ® Suspensions' parts are guaranteed to the original purchaser to be free of manufacturing defects and workmanship. Parts that fail to conform to these conditions will be repaired or replaced at Legend ® Suspensions' option if the parts are returned to Legend ® Suspensions by the original purchaser. Delivery of the original purchases invoice or receipt along with the part to Legend ® Suspensions is a condition precedent to Warranty coverage. Warranty coverage is limited lifetime.

In the event the original purchaser believes warranty service is required, the original purchaser must call or e-mail Legend ®
Suspensions immediately to discuss the concern. Some concerns may be rectified by a telephone call and need no further course of

A part that is suspect of being defective must not be replaced by a Dealer or any other person without prior written authorization from Legend ® Suspensions. If it is deemed necessary for Legend ® Suspensions to make an evaluation of the part to determine whether a defect exists, a return authorization number (RAH) must be obtained from Legend ® Suspensions by the original purchaser. Properly obtaining a return authorization number from Legend ® Suspensions is a condition precedent to Warranty

The part must be packaged properly so as to not cause further damage and be returned prepaid to Legend ® Suspensions with a copy of the original invoice or receipt of purchase. If other evaluation, Legend ® Suspensions finds the part to be defective, Legend ® Suspensions will repair or replace the part, at the discretion and option of Legend ® Suspensions.

- Exclusions
 This warranty is void if:
 (1) the Legand ® Suspensions' part is repaired, modified or altered, unless such repair, modification or alternation is expressly authorized by Legand ® Suspensions in writing;
 (2) the Legand ® Suspensions' part becomes defective in whole or in part as a result of improper installation, improper maintenance, improper use, abnormal operation, or any other misuse or mistreatment of the Legand ® Suspensions' part;
 (3) the Legand ® Suspensions' part is installed or used in any motorcycle or other vehicle other than an Unmodified Factory OEM Motorcycle;

Motorcycle (4)the Legend ® Suspensions' part is installed or used on any motorcycle or other vehicle being used in any form of competitive riding or racing, off road riding, or shurt riding. Shurt riding shall include, but not be limited to, any form of competitive riding or racing, off road riding, or shurt riding, or operating the motorcycle at an excessive rate of speed; (5) the Legend ® Suspensions' part is installed or used on any motorcycle or other vehicle being operated at a speed in excess of the speed allowed by any applicable law, regulation, or ordinance or is operated in any other manner in violation of any applicable law, regulation or ordinance; (6) the serial or parts identification number of the Legend ® Suspensions' part is defaced or missing; (7) the Legend ® Suspensions' part is returned with no authorization number issued from Legend ® Suspensions; or (8) the original purchase invoice or receipt is not provided to Legend ® Suspensions along with the part.

- Additional Limitations

 (1) Legend ® Suspensions shall have no warranty or liability obligation to cover work shop labor charges incurred to install or remove suspension systems or individual components.

 (2) Electrical components are limited to a one-year manufacturer's warranty from the original invoice date or installation.

 (3) Limited lifetime warranty as used within this warranty is further defined as the lifetime of the specific product line. Any product line that has been discontinued for which replacement parts are no longer available by is not covered by this warranty.

 (4) The customer is liable for shipping charges to and from Legend ® Suspensions for warranty repairs or replacement parts consistent with this warranty.

LEGEND ® SUSPENSIONS (INCLUDING ITS SUBSIDIARIES, AFFILIATES, OFFICERS, DIRECTORS, EMPLOYEES, AGENTS OR SHAREHOLDERS) SHALL NOT, UNDER ANY CIRCUMSTANCES, WHETHER AS A RESULT OF BREACH OF CONTRACT, BREACH OF WARRANTY, TORT, STRICT LIBBILITY, HE FAILURE TO DELIVER, DELIVERY IN NON-CONFORMING CONDITION, OR FOR ANY OTHER BREACH OF CONTRACT OR DUTY BETWEEN LEGEND ® SUSPENSIONS AND A CUSTOMER OR OTHERWISE, BE LIABLE FOR CONSEQUENTIAL, INCIDENTAL, SPECIAL OR EXEMPLIARY OF POINTIVE DAMAGES INCLUDING, WITHOUT LIMITATION, LOSS OF PROFITS OR REVENUES, LOSS OF OTHER GOODS OR ASSOCIATED EQUIPMENT OR BAMAGES TO ANY ASSOCIATED EQUIPMENT, COST OF CAPITAL OR LABOR, COST OF REPLACEMENT OR SUBSTITUTE PRODUCTS, OR LOSS OF TIME. IN THE EVENT THAT LEGEND ® SUSPENSIONS SHALL BE UNABLE TO REPART OR REPLACE THE PRODUCT AS REQUIRED HEREIN, THE LIABILITY OF LEGEND ® SUSPENSIONS TO YOU OR ANY OTHER PARTY SHALL NOT EXCEED THE PRICE ACTUALLY PAID BY YOU FOR THE PRODUCT, DOT THE PAYMENT OF WHICH, LEGEND ® SUSPENSIONS SHALL BURGEND OF THE PRODUCT OF THE PRO

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE. SOME STATES DO NOT ALLOW THE EXCLUSION OF LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

WARNING: Legend ® Suspensions assumes no responsibility for damage or injuries which may result from the use or installation of its products, whether or not properly installed or used. Installing a Legend ® Suspension may decrease initial ground clearance when in lowered position. The motorcycle will be lower to the ground and care should be token to avoid bottoming out, especially over bumps or in turns. To maintain proper balanced geometry, we recommend riding in the stock height position.

Dispute Resolution
You agree that any dispute between you and Legend ® Suspensions arising hereunder will be resolved exclusively and finally by arbitration administered by the American Arbitration Association ("AAA") and conducted under its rules, except as otherwise provided below.

The arbitration will be conducted before a single arbitrator and will be limited solely to the dispute between you and Legend ® Suspensions. The arbitration shall be held at any reasonable location in Meade County, South Dakato, or by submission of documents, by telephone, online or in person. Any decision rendered in such arbitration proceedings will be find and binding on each of the parties, and judgment may be entered thereon in any court of competent jurisdiction. Should either party bring a disubsrements incurred in staying or dismissing such other provides reasonable costs and expenses, including attorney follows:

YOU UNDERSTAND THAT YOU WOULD HAVE HAD A RIGHT TO LITIGATE DISPUTES THROUGH A COURT, AND THAT YOU HAVE EXPRESSLY AND KNOWINGLY WAIVED THAT RIGHT AND AGREED TO RESOLVE ANY DISPUTES THROUGH BINDING ARBITRATION.


For the purposes of this section, the term "dispute" means any dispute, controversy, or claim arising out of or relating to: (1) this Agreement, its interpretation, or the breach, termination, applicability or validity thereof, or (2) the purchase or use of any Product, Accessory, service or otherwise from Legand © Suspensions.

purposes of this Agreement, the term Legend ® Suspensions means Legend ® Suspensions, its subsidiaries, affiliates, directors, officers, Joyees, beneficiaries, agents or assigns; the term "you" means you, the original purchaser, your agents, beneficiaries, or heirs.

Solver mig Luw both Dokota to govern, interpret, and enforce all of your rights and Legend ® Suspensions consent to the application of the laws of the State of South Dokota to govern, interpret, and enforce all of your rights and Legend ® Suspensions' rights, dulies, and obligations arising from, or relating in any manner to, the subject matter of this Limbed Lifetime Warranty, without regard to conflict of low principles.



PROPERLY SUPPORT YOUR MOTORCYCLE PRIOR TO SUSPENSION INSTALLATION!

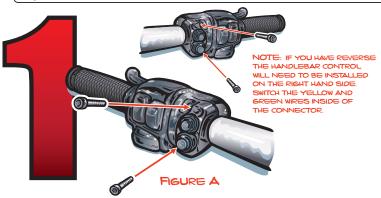

STEP ONE: HANDLEBAR CONTROL


- A. REMOVE OF CLUTCH CLAMP.
- B. RE-USING OE HARDWARE, INSTALL LEGEND HANDLEBAR CONTROL AS SHOWN IN FIGURE A.
- C. ROUTE CABLE DOWN THE HANDLEBARS AND UNDER THE GAS TANK TO THE BATTERY COMPARTMENT.
- D. SECURE CABLE USING CABLE-TIES.





PARTS INCLUDED:

(1) 112-2103 - RHS SHOCK (1) 112-2104 - LHS SHOCK (1) 112-1204 - COMPRESSOR ASSEMBLY (1) 800-0054 - WIRING HARNESS (1) 200-1711 - HANDLEBAR CONTROL (1) 200-3002 - AIR TUBING, 8 FT. (l) 200-3000 - TUBE CUTTER (l) 200-2003 - Y-FITTING (4) 102-IIII - SPACER, 050X095X063X03I* (2) 800-0002 - SCREW, 1/2-13X2* (2) 200-20II - SCREW, 1/2-13X175*

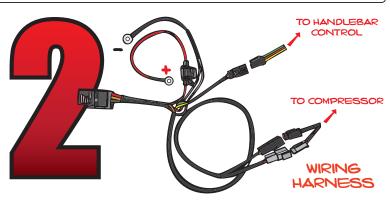

STEP TWO: WIRING HARNESS

- A. REMOVE THE FUSE FROM THE FUSE HOLDER.
- B. CONNECT THE HANDLEBAR CONTROL CONNECTOR TO THE MATING CONNECTOR ON THE WIRING HARNESS.
- C. CONNECT RED WIRE TO POSITIVE TERMINAL, AND BLACK WIRE TO NEGATIVE TERMINAL ON BATTERY.
- D. FROM THE BATTERY COMPARTMENT ROUTE THE COMPRESSOR END (GRAY & BLACK CONNECTORS) OF THE HARNESS TO THE COMPRESSOR LOCATION UNDERNEATH THE BIKE SHOWN IN FIGURE B. FOLLOW THE MAIN WIRING HARNESS ALONG THE FRAME RAIL

STEP THREE: COMPRESSOR MOUNT

- A. CONNECT THE GRAY AND BLACK CONNECTORS FROM THE WIRING HARNESS TO THE MATCHING COLOR CONNECTORS ON THE COMPRESSOR ASSEMBLY.
- B. CONNECT AIR TUBING TO THE FITTING ON THE COMPRESSOR ASSEMBLY.
- C. APPLY BLUE THREAD LOCKER TO THE FASTENERS,
 AND MOUNT COMPRESSOR ASSEMBLY TO THE FRAME
 RAILS IN FRONT OF THE OIL PAN AS SHOWN IN FIGURE B.
- D. ROUTE AIR TUBING TO THE BATTERY COMPARTMENT ALONG WITH THE WIRING HARNESS, AND SECURE WITH CABLE-TIES. AVOID HOT COMPONENTS.

STEP FOUR: SHOCKS

- WITH MOTORCYCLE PROPERLY SUPPORTED ON JACK, REMOVE THE OE SHOCKS.
- B. APPLY BLUE THREAD LOCKER TO THE FASTENERS, AND INSTALL YOUR LEGEND SHOCKS ACCORDING TO THE HARDWARE CONFIGURATION IN FIGURE C, WITH AIR FITTINGS POINTING FORWARD. MOUNT WITH CIRCLIP FACING OUT, AND SILVER LABEL FACING IN.
- CAUTION MAKE SUICE TURING IS
- C. TORQUE HARDWARE TO DE SPECIFICATIONS.
- D. ROUTE AIR TUBING FROM EACH SHOCK AND CONNECT TO AIR TUBING FROM THE COMPRESSOR USING SUPPLIED Y-FITTING.

STEP FIVE: OPERATION

- A. REINSTALL THE FUSE IN THE FUSE HOLDER
- PUSH TOP BUTTON TO INFLATE SHOCKS,
 AND BOTTOM BUTTON TO DEFLATE SHOCKS.
- C. CHECK TIRE TO FENDER CLEARANCE WHEN SHOCKS ARE FULLY COMPRESSED.
- D. WITHOUT SITTING ON THE BIKE, INFLATE
 SHOCKS UNTIL THE BIKE STOPS RISING
- E. THE BIKE SHOULD SAG DOWN LESS THAN ONE INCH WHEN YOU SIT ON YOUR BIKE WITH ALL THE WEIGHT YOU WILL BE RIDING WITH.
- F. GO RIDING, AND ADJUST SPRING RATE ON-THE-GO TO YOUR PREFERENCE.

