

MEM-9840
METRIC *NARROW SPORTS SHIELD
MOUNTING PLATE INSTRUCTIONS

TOOLS REQUIRED: 3/16" Allen Wrench

7/16" or 11mm Wrench

ALWAYS COVER THE FRONT FENDER AND GAS TANK TO PREVENT ANY POSSIBLE DAMAGE

1. Install the mounting plates on the windshield using the bolts that are pre-assembled on the mounting plates. The rubber grommets should be inserted through the holes in the windshield so that the flat round washer part of the grommet lays flat on each side of the windshield. On each plate, get both started before you tighten either. (See Figure 1.1 & 1.2)

Install Note: *(Narrow) -Tabs point away from each other when installed correctly.

2. Loosen the four bolts that are to hold the windshield to the fork clamps, and slide the mounting plates onto the fork clamps. (See figure 2)
3. Adjust the height, angle, and alignment of the shield and tighten down the bolts that hold the windshield to the plates, then the bolts that hold the plates to the fork clamps, then the clamps themselves.
4. Place the non-used windshield in a safe storage area. Preferably in a Memphis Shades windshield storage bag. Storage bag for Fats/Slims part #MEM0980, Storage bag for Sportshields part #MEM0985.

WARNING: This is a quick disconnect kit. Always tighten down all mounting bolts after removing or installing the windshield every time

Fig. 1.1 Left side plate

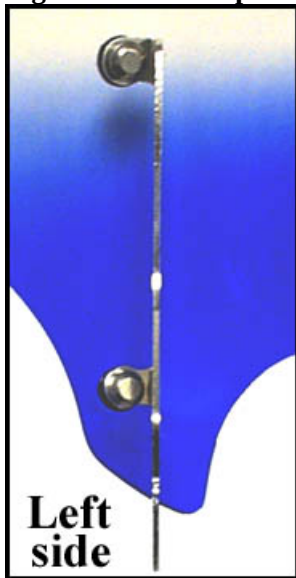


Fig. 1.2 Right side plate


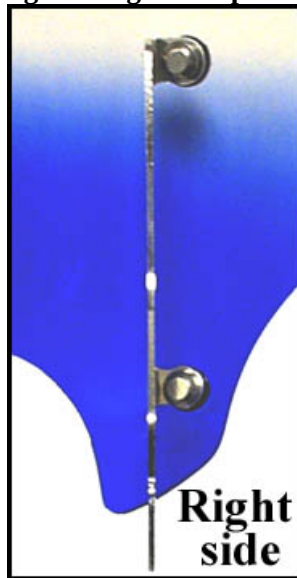


Fig.2 Shows wide plates mounted

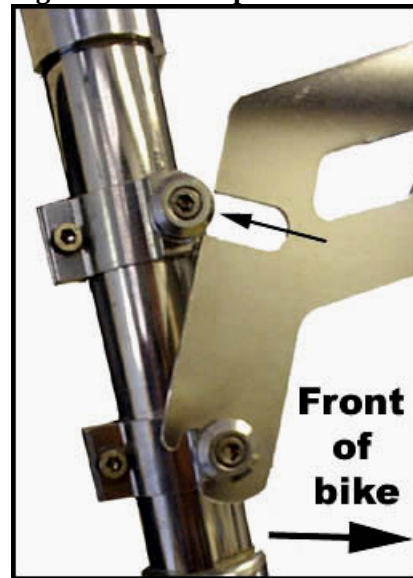

Care and Cleaning

To clean your windshield, use only warm water and a mild non-abrasive, dishwashing liquid. Use a soft cloth, such as a t-shirt or flannel cloth. To protect your windshield, please use **NOVUS #2** to remove minor scratches, or use a polish like **MEMPHIS SHADES SHINOLA** which is specially designed for plastic windshields; glass cleansing agents will cause **severe damage** to your windshield and **will void** your warranty.

Never use any glass products, petroleum based chemicals, or cleaning agents with ammonia, bleach or any harsh chemicals. This includes Rain-X brake fluid, acetone, and gasoline.

**MEM-9840 MOUNTING KIT
METRIC NARROW SPORTSHIELD**

PART #	DESCRIPTION	QTY.
M840	Mounting Instructions/Parts List	1
M795	Left Mounting Plate	1
M796	Right Mounting Plate	1
M504	Socket Shoulder Washer	4
M505	Button Nut	4
M543	Santoprne Grommet	4
M302	¼"-20 x ½" SS Socket Head Cap Screw	4

**Memphis Shades warrants all product components, metal and plastic,
against defects in materials and workmanship for 24 months.**

FOR PARTS AND WARRANTY HELP, CONTACT:

MEMPHIS SHADES

P.O. Box 429

Rossville, TN 38066

(901) 853-0293

Visit us on the web at www.memphisshades.com or

you can also reach us at

customerservice@memphisshades.com