



WINCH MOUNT INSTALLATION INSTRUCTIONS 98-01 YAMAHA 600 GRIZZLY

NOTE: Fairlead is not included with this winch kit
PART# 4505-0649

Remove the front bumper skid plate.



NOTE: On the '98 model you may need to remove the two bottom fasteners that hold the radiator. This allows the radiator to be moved so you can slide the winch mount in place.

Remove the lower bumper bolts and place winch mount in place. Attach the back legs to this location with the 8mm x 25mm flange bolts (if there is a gap, use the 5/16 washer between the bumper and winch mount leg).

Slide the front bumper skid plate back in place under the winch mount front tabs. Use the 8mm x 20mm flange bolts to secure front of winch mount in place using the original screws you removed in lower portion of skid plate.

Attach winch and fairlead with hardware provided with winch and wire per winch manufacturer's instructions.

ITEM	QTY.	PART#	DESCRIPTION
1	1	1541-1	Main Winch Mount Plate
2	2	HDW1051	8mm x 20mm Flange Bolt
3	2	HDW1052	8mm x 25mm Flange Bolt
4	2	HDW9002	5/16 Flat Washer

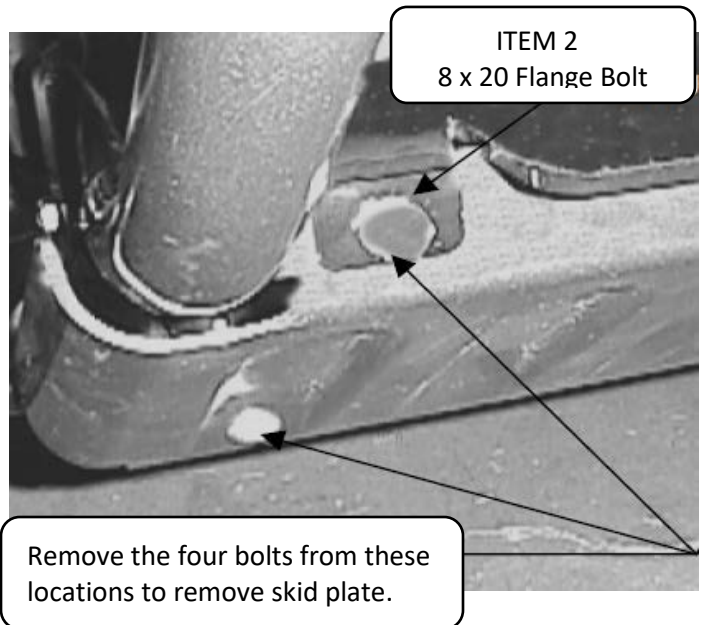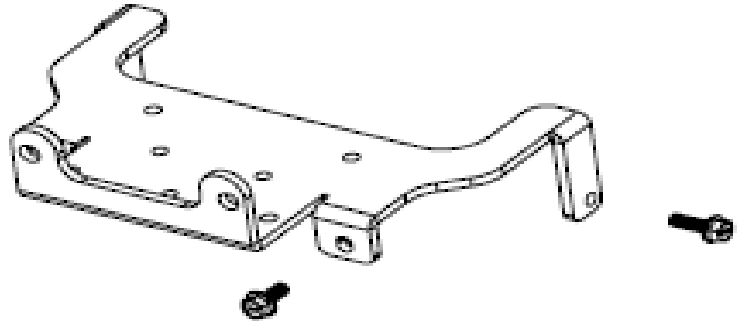

FOR QUESTIONS OR COMMENTS

PLEASE CALL: 320-964-1616

(7:00 to 4:30 CST Monday through Thursday).

INST1541PF