



# Hurricane Duffle Bag Instructions

SE-4025  
SE-4040


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the product mounts. It is the rider's responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position. **Always check for proper mounting position after loading and before each and every ride.**

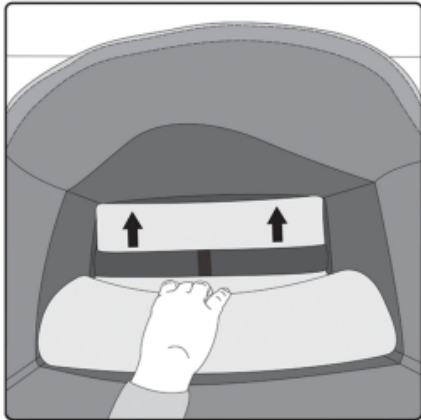


1. Take the large plastic stiffener and insert it under the loop at the bottom of the bag and into the flaps. Sometimes rolling the stiffener will make it easier to insert smoothly.

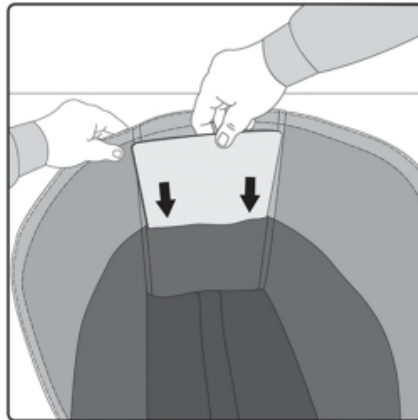


2. Insert the 2 small rectangle plastic stiffeners into each end of the bag.

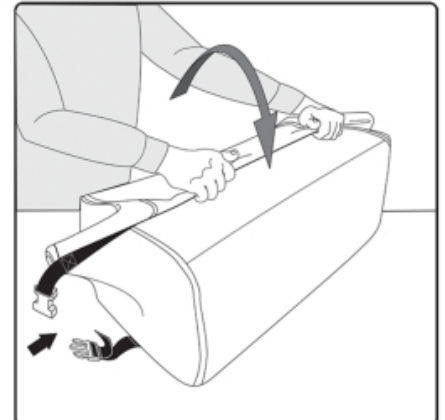


3. Pack heavier contents at bottom for better weight distribution. Roll a minimum of 3 half turns. Connect the buckles on each side and pull tight. Open the air valve 1/4 turn to allow bag to compress. Be sure to close when done and not over tighten.

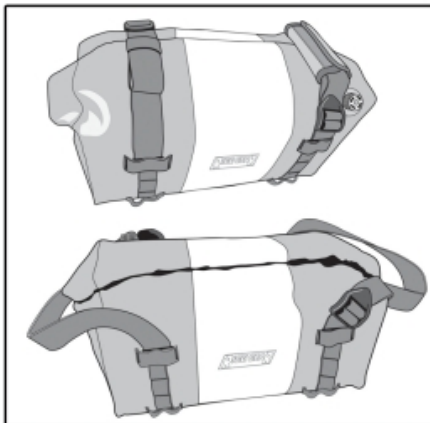

4. The left and right straps can be used as compression straps to better secure your contents. When accessing the bag, loosen the straps and hang off to the sides.

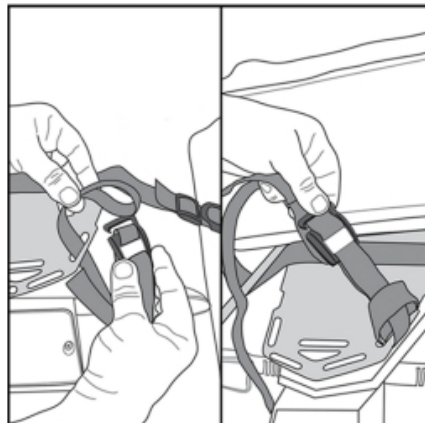

5. To mount your bag, loop one of the four Rigg Straps® around a rack or secure location on your vehicle. Pass the cam hook through the loop on the long strap end and pull tight. Repeat with other 3 straps.

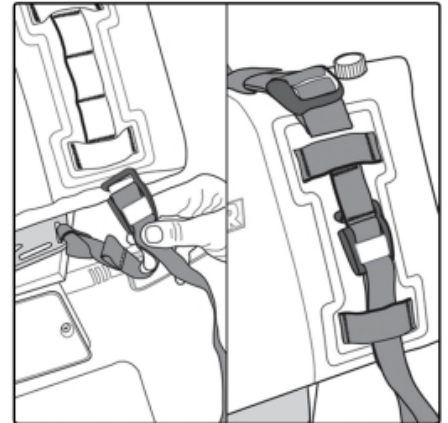

6. Pass the cam hook through the large webbing loop and hook onto one of the MOLLE loops on the bag. Repeat on all 4 corners and then pull down to tighten all straps.

## Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

**Always drive safely. Always wear a helmet and protective apparel.**


3518 W Lake Center Drive, Ste. A Santa Ana, CA 92704 USA  
Tel (714)850-1811 E-mail: [info@nelsonrigg.com](mailto:info@nelsonrigg.com) [www.nelsonrigg.com](http://www.nelsonrigg.com)

**RIGG GEAR**  
ADVENTURE


# Hurricane Duffle Bag Instructions

SE-4025  
SE-4040


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the product mounts. It is the rider's responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position. **Always check for proper mounting position after loading and before each and every ride.**

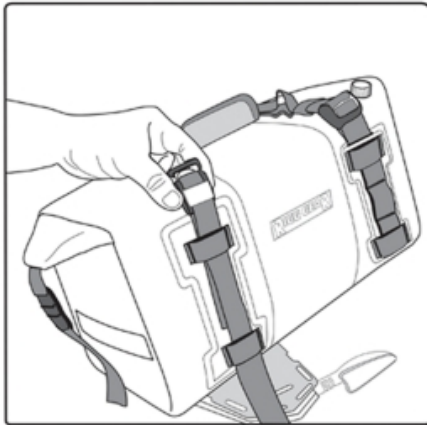


7. Alternatively you can strap the bag over the top. Once strap is attached to the rack, pass the cam hook through both large loops on the bag. Repeat on the other side.

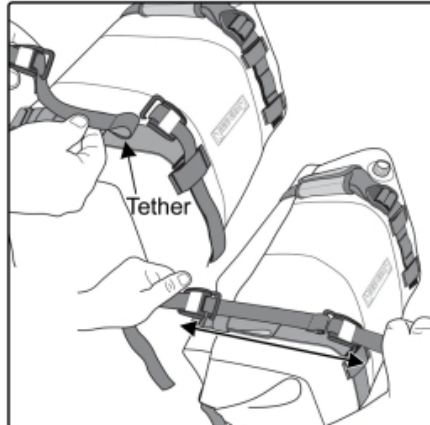


8. Take the tether loop from one of the cam hooks and connect to the hook on opposite cam hook as shown. Pull the straps on both sides to secure in place.

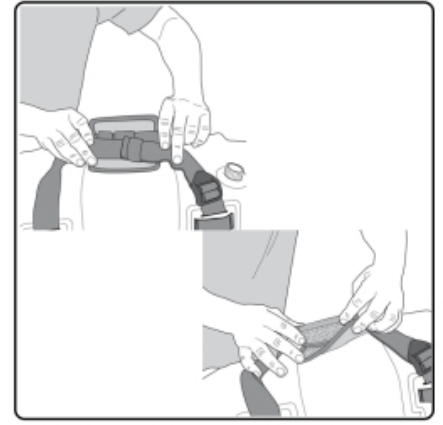


9. To convert into carry handles, lay the straps inside the self-fastening handle pad and fold over to seal.

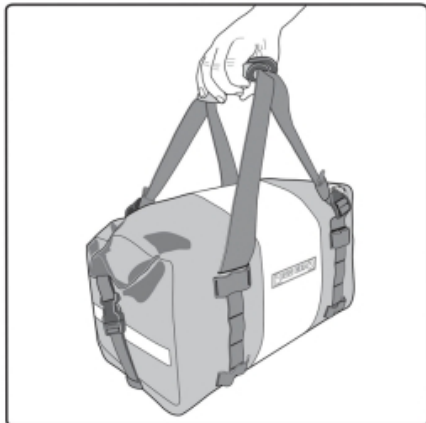

10. You can change the orientation of the carry handles as shown above going from front to back of the bag.

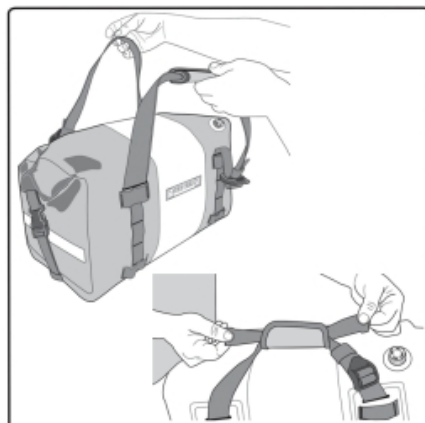

11. Or can change the orientation of the carry handles as shown above going from left to right of the bag.

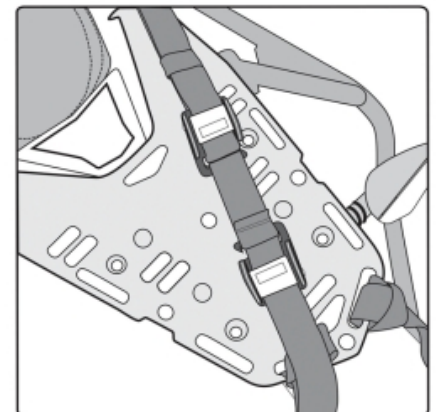

12. When you remove your bag, you can choose to leave your Rigg Straps® on the bike and/or use them to secure other bags or gear.

## Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

**Always drive safely. Always wear a helmet and protective apparel.**

3518 W Lake Center Drive, Ste. A Santa Ana, CA 92704 USA  
Tel (714)850-1811 E-mail: [info@nelsonrigg.com](mailto:info@nelsonrigg.com) [www.nelsonrigg.com](http://www.nelsonrigg.com)

**RIGG GEAR**  
ADVENTURE