


Automatic Tire Inflation Kit Instructions and Details

IMPORTANT: Read Instructions Before Use

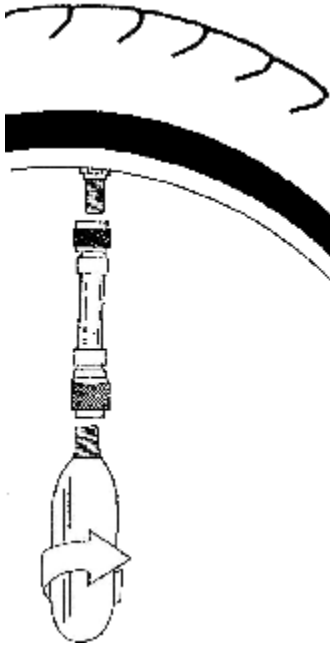

Instructions

1. Slowly thread the CO₂ Canister onto the larger (bottom) brass fitting.
2. Thread smaller brass end of valve adapter onto the tire valve all the way.
3. Use pliers to firmly grip adapter where it meets the Canister.
4. Grip Canister firmly on protective foam tape (Avoid skin contact to metal).
5. The final twist of the canister will puncture the seal and allow the CO₂ gas to escape into the tire.
6. Your tire valve prevents new inflation from escaping during this process.
7. After the desired air pressure is achieved, remove the valve adapter. Replace with regular air pressure as soon as possible. Used Canister is made of recyclable material.



CAUTION!

When the seal of the Canister is punctured, the metal instantly drops to -64°F. Use some protective material or turn with a pair of insulated pliers to *avoid frost burns!*

Pure CO₂ Gas is a natural **High Pressure** gas. Each Canister contains 16 grams of liquid CO₂ which becomes CO₂ gas when released.

- Safe and Easy to Use -
- Environmentally Responsible (No CFCs or HCFCs) -

WARNING!

- Do Not Inhale Contents.
- Do Not Remove Canister until Empty
- Only Use in Upright Position.
- Keep Away from Children.
- Keep Out of Direct Sunlight.
- Do Not Store in Areas Exceeding 140°F (60°C).