


TECMATE is introducing a **new line of POWER accessories**, starting with a clever USB charger, a practical 6-LED flashlight and a Charge Now! indicator. Moving forward from providing reliable electrical power to the vehicle thanks to the successful OptiMate range of chargers, we intend to optimize use of the power available onboard the vehicle.



You can now **charge your USB** compatible device while on the go: ipod, mobile phone, digital camera, satellite navigation device, you name it.



Need **emergency light** while out for a ride or you are not sure your vehicle charging system is working right? Use the 6-LED flashlight, a reliable, powerful light source that checks battery status and if the vehicle charging system is working correctly. Works great in the workshop to light up those hard-to-see places on your bike.


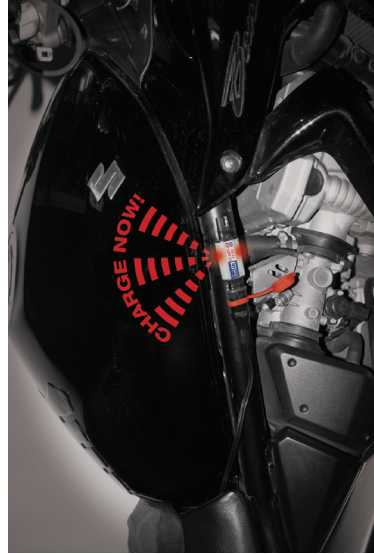


Storing your vehicle for a long period of time in a place where you have no access to mains, but want to monitor when you will need to recharge the battery? Our **Charge Now!** warning flasher warns when your battery needs recharging. Charge the battery via the indicator.



OptiMATE
accessories

NEW

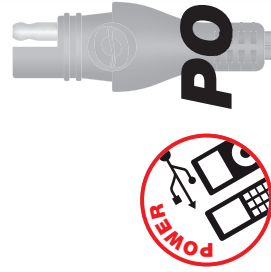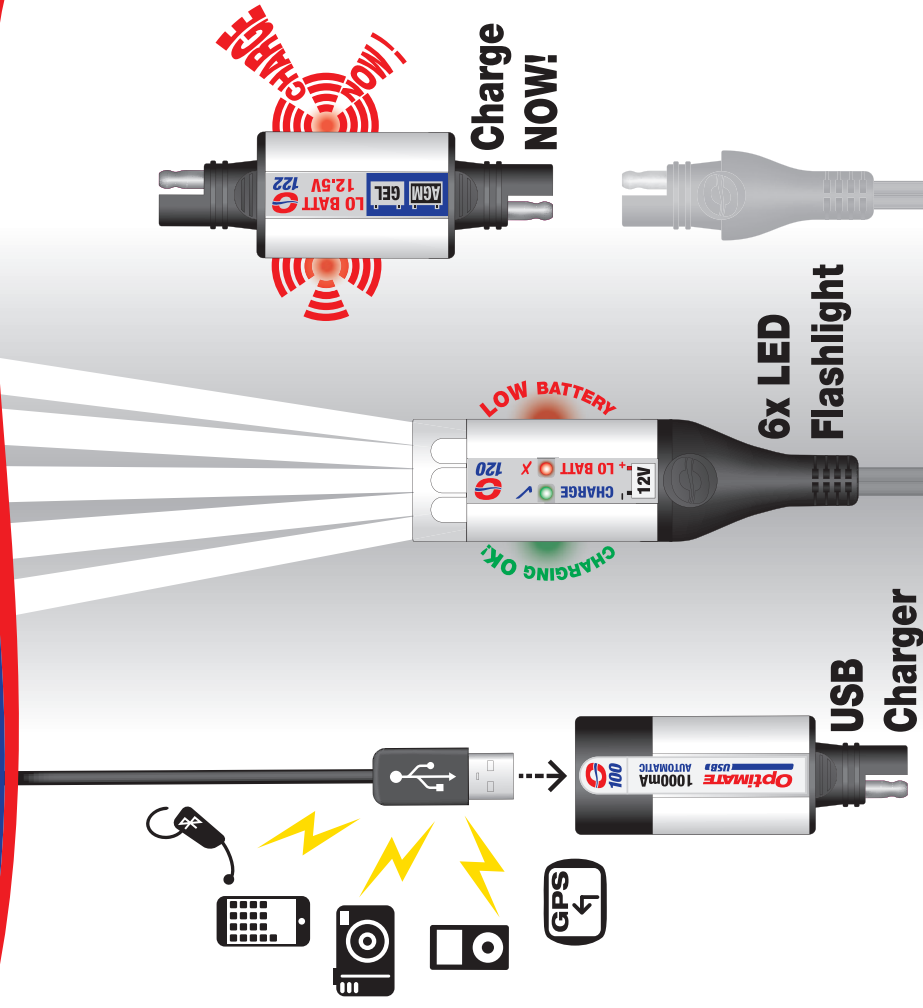


POWER ACCESSORIES



optimate1.com

UNIVERSAL USB CHARGER

Works with most USB powered devices
Adapters are Garmin, Apple compatible.
 IN: 12V 0.5 A max.
 OUT: 5V 1000mA – 5 Watt

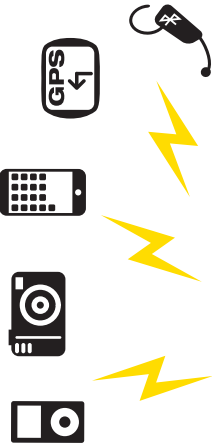

100

SAE connector

0100 / 101
Delivered with:

- USB extender
- USB mini adapter
- USB micro adapter



101

TM (KET) connector




102

SAE connector

Delivered with:

- USB mini adapter
- USB micro adapter

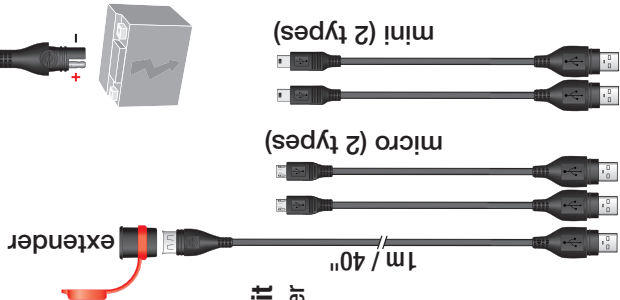


109

USB connector kit

- USB extender
- USB mini adapter (2 types)
- USB micro adapter (2 types)

compatible with most USB devices




12V LED FLASHLIGHT

120

12V FLASHLIGHT + BATTERY and VEHICLE CHARGE SYSTEM CHECK

SAE connector
 1m / 40" cable
 0.1 A max.
 -20°C/-4°F

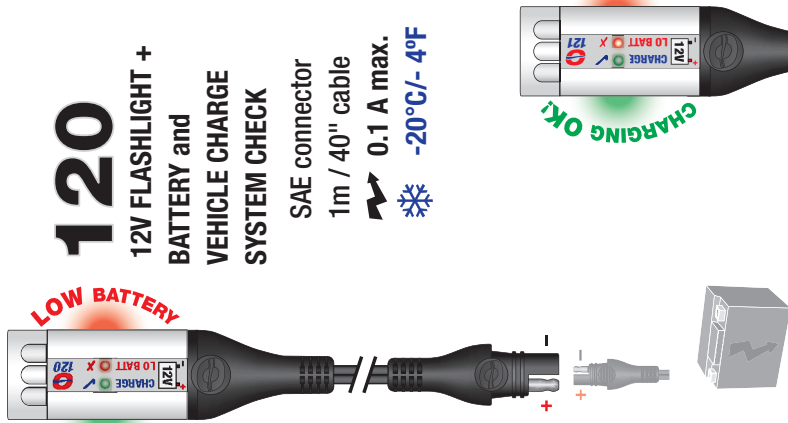


121

12V FLASHLIGHT + BATTERY and VEHICLE CHARGE SYSTEM CHECK

TM (KET) connector
 1m / 40" cable
 0.1 A max.
 -20°C/-4°F



CHARGE NOW! WARNING FLASHER

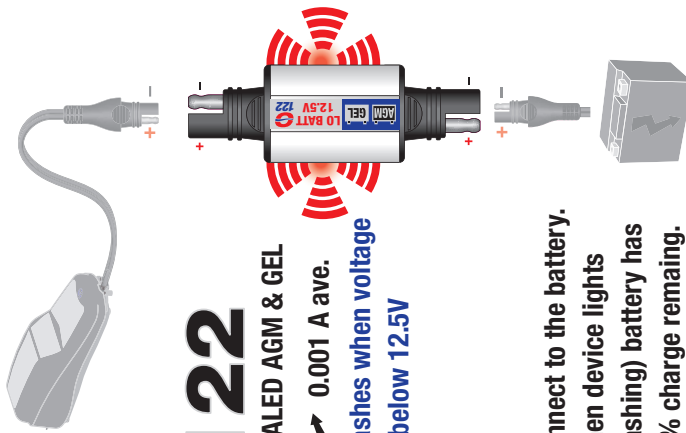


122

SEALED AGM & GEL

0.001 A ave.

Flashes when voltage below 12.5V

Connect to the battery. When device lights (flashing) battery has 50% charge remaining. Time to recharge!

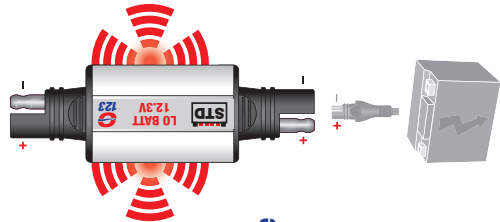

123

STD / Wet cell

0.001 A ave.

Flashes when voltage below 12.35V

SAFETY:

- Low input (12.4V) auto-off
- Short circuit proof
- Overload protected