
TECHNICAL NOTES: 386EVO-SRAM



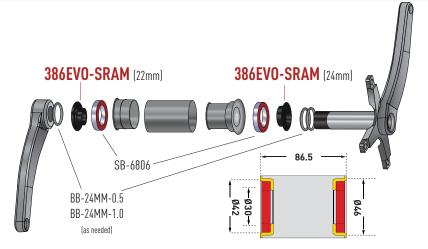

Recommended tools:

QTY Included

1

1

4


4

SOLD SEPARATELY

- Plastic or rubber mallet
- Grease
- 8mm Allen Wrench
- **Torque Wrench**

386EVO-SRAM PART LIST

Part #
386EVO-SRAM-LEFT
386EVO-SRAM-RIGHT
BB-24MM-0.5
BB-24MM-1.0
SB-6806

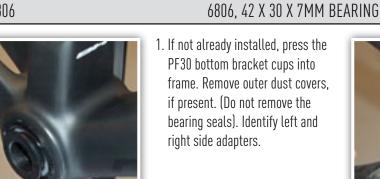

1. If not already installed, press the PF30 bottom bracket cups into frame. Remove outer dust covers. if present. (Do not remove the bearing seals). Identify left and right side adapters.

Description

PF30-GXP 22MM CRANK SPINDLE SHIMS

0.5MM SPACER FOR 24MM BB SPINDLE

1.0MM SPACER FOR 24MM BB SPINDLE

PF30-24MM CRANK SPINDLE SHIMS

3. Install crank spindle through the adapters and tighten per manufacturer's instructions.



2. Start inserting adapters into bottom bracket bearings by hand. Seat adapters using a rubber mallet.



4. Take up any play in your cranks with supplied Crank Spindle Spacers. Place the spacers as needed.



All Wheels Mfg, products have a lifetime warranty and are 100% quaranteed to work for you upon purchase. We accept returns or refunds only if purchased directly from us. For a refund, a product must be purchased directly from Wheels Mfg, and must be returned in new condition with original packaging and receipt. Email us (customerservice@wheelsmfg.com) or call (1-800-361-8422) for a Return Authorization number. Freight charges to Wheels Mfg. are the responsibility of the customer.

We accept products purchased through Wheels Mfg. Authorized Resellers for exchange only. For refunds, please return the product to that Reseller. If the product was purchased from an internet seller or local bike shop, please return the product to them for exchange or refund.

Wheels Mfg will replace or refund defective products at our discretion.