



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

070BG112110

SUZUKI Hayabusa

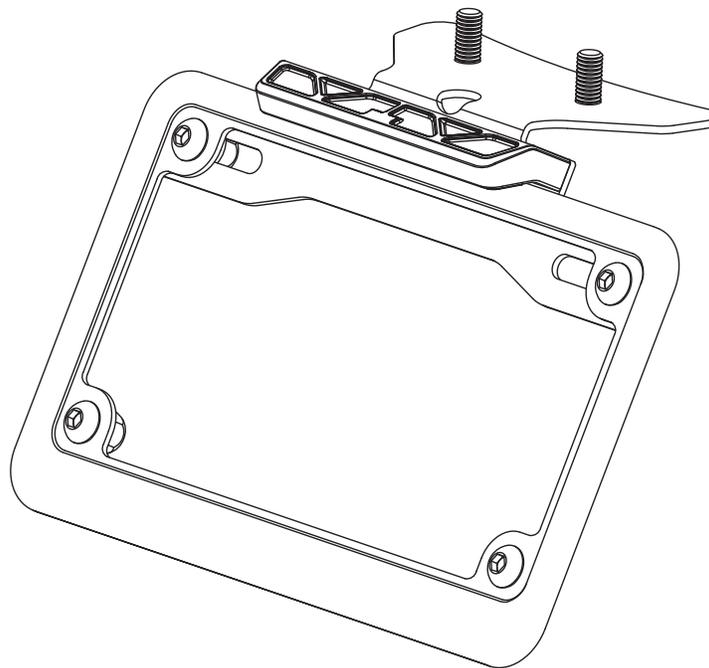


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



Assembly Diagram

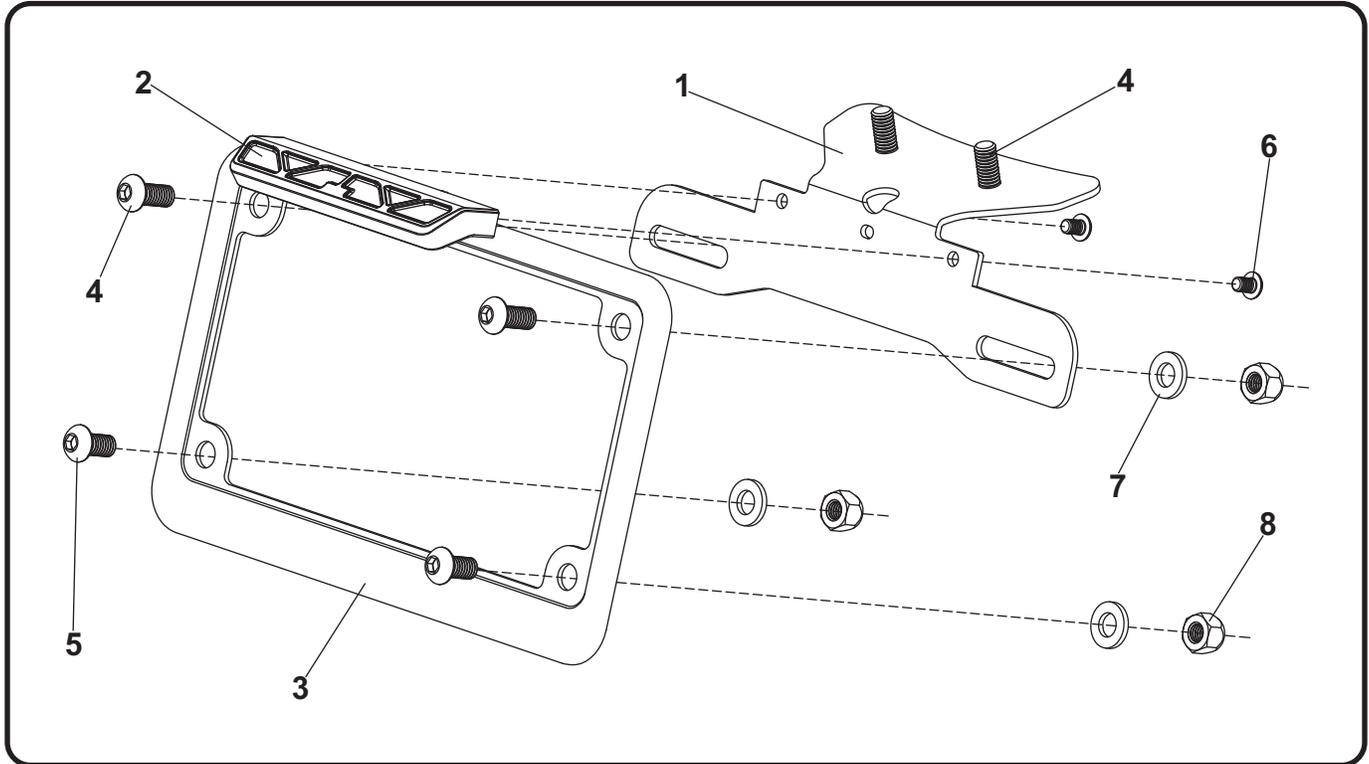

No.	Item	Description	Qty.
1	11211-FEBKT	Fender Eliminator Bracket	1
2	070BG-LH-K1	LED License Plate Light	1
3	070BG-LPF	License Plate Frame	1
4	M6X14BHS	6mm x 14mm Button Head Screw	4
5	M6X12BHS	6mm x 12mm Button Head Screw	2
6	M4X6BHS	4mm x 6mm Button Head Screw	2
7	6MMWASHER	6mm Flat Washer	4
8	6MMLN	6mm Nylon Lock Nut	4
**	BN-SSS-22-18	Solder Shrink Connectors	2
**	17100	Sticker Sheet	1


** Not shown in diagram

Removal

1. Remove passenger seat.
2. Locate and disconnect license plate light.
3. While securely supporting the stock fender assembly, remove the four bolts securing fender to subframe and carefully remove the stock fender assembly.
4. Cut the stock license plate light wires 2" from the license plate light.

Installation

1. Install (No. 2) *070BG-LH-K1*, Yoshimura license plate light onto (No. 1) *11500-FEBKT*, fender eliminator bracket using (No. 8) *M4X6BHS*, 4mm button head screws.

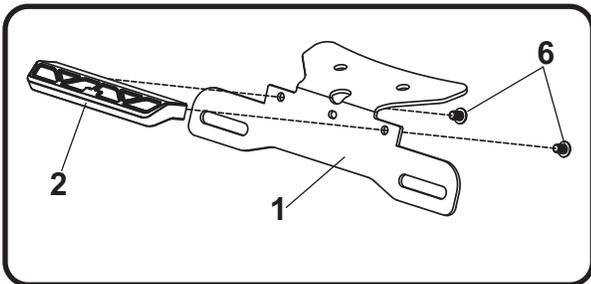

2. Route license plate light wire through hole in bracket and connect the Yoshimura license plate light wires to the stock license plate light wires as follows:


Red -to- White
Black -to- Black

- a) Strip the stock license plate light wire ends 1/4" - 1/2" and insert into *BN-SSS-22-18*, solder shrink connectors provided in the kit.
- b) Center the spliced wire ends in the middle and using a heatgun or lighter, apply heat evenly on the outer edges of the solder shrink connector to shrink and hold wires in place.
- c) Making sure that the stripped ends are centered, heat the center of the solder ball connector evenly until the solder begins to liquify.
- d) Allow to cool completely and tug both ends of the wires to verify that connection is secured.


Scan for link to solder shrink connector instruction video.



3. Route license plate light wire through undertail and install (No. 1) *11211-FEBKT*, fender eliminator bracket using (No. 4) *M6X14BHS*, 6mm button head screws as shown.

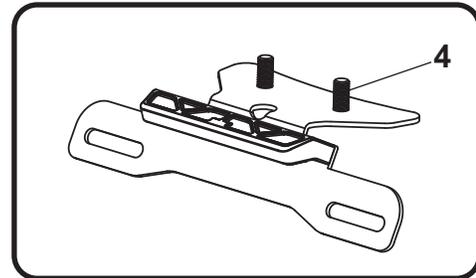

4. Install (No.3) *070BG-LPF*, license plate frame to (No. 1) *11211-FEBKT*, fender eliminator bracket using (No 4,5) 6mm button head screws, (No. 7) *6MMWASHER*, 6mm washers, and (No. 8) *6MMLN*, 6mm nylon lock nuts as shown.

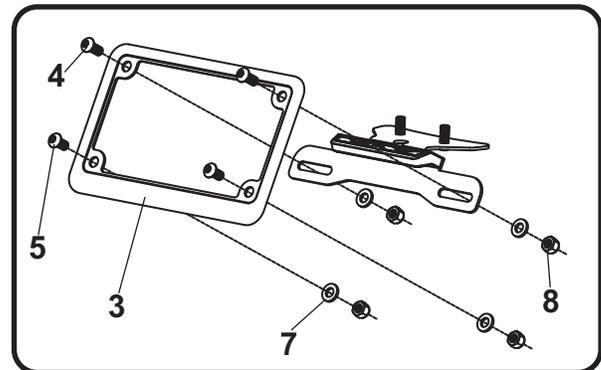

5. Re-connect license plate light connector.
6. Reinstall passenger seat.
7. Check for proper function of license plate light and that all brackets and components are secure prior to riding.