


# SENA

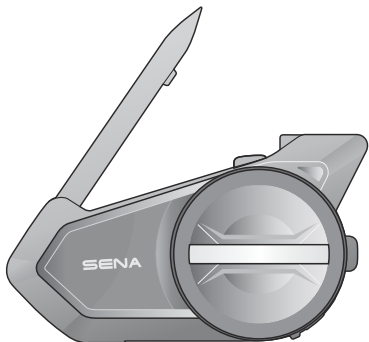

## 505

MOTORCYCLE BLUETOOTH®  
COMMUNICATION SYSTEM  
WITH MESH INTERCOM™

———— SOUND BY ————  
**harman/kardon®**

QUICK START GUIDE

ENGLISH / 2.0.0

# RIDE CONNECTED

The 50S takes a trusted design and makes major upgrades in both hardware and software. With Mesh Intercom™ technology, it's time for an all-new experience of riding connected.



Bluetooth® 5.0



Multi-Way Intercom



Mesh Intercom™ up to 2 km (1.2 mi)\*



Intercom up to 2 km (1.2 mi)\*



Audio Multitasking™



- Multi-Language Voice Command
- Support Siri and Google Assistant

\* in open terrain

# GETTING STARTED

## Icon Legend



**Tap** button/Jog Dial the specified number of times



**Press and Hold** button/Jog Dial for the specified amount of time



**Rotate** Jog Dial clockwise (right) or counterclockwise (left).



**Rotate while Pressing** Jog Dial clockwise (right) or counterclockwise (left).



*"Hello"*

**Audible prompt**

Follow us on Facebook, YouTube, Twitter and Instagram to check the latest information and helpful tips.

**SENA**

SENA Technologies, Inc.

[sena.com](http://sena.com)




# GETTING STARTED

## How to Use This Guide

The legend and callouts are here to help you read the illustrations. New technology can be confusing, but we've created a simple way to perform actions using illustrations.




## Buttons

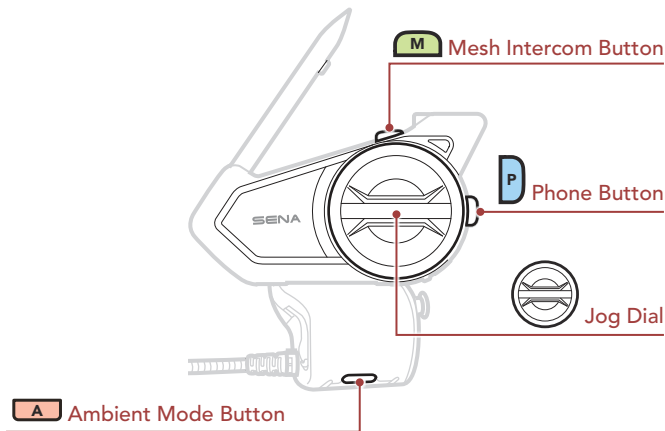





# QUICK START GUIDE

## Product Details

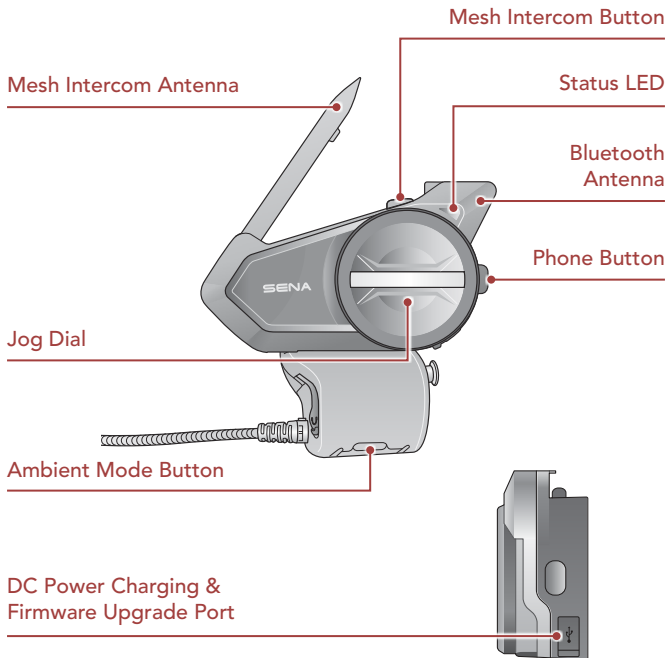


# QUICK START GUIDE

## Installation



## Mesh Intercom Antenna

Pull the Mesh Intercom Antenna outwards slightly to unfold it.



# QUICK START GUIDE

## Downloadable Sena Software

Download the **SENA MOTORCYCLES App** at [Google Play Store](#) or [App Store](#).



### SENA MOTORCYCLES

- Device configuration setting

Download the following items at [sena.com](#).



### Firmware



### Sena Device Manager

- Firmware upgrade
- Device configuration setting



### Quick Start Guide, User's Guide

## NOTICE

- This **Quick Start Guide (Version 2.0)** explains how to operate the 50S with **firmware version 2.0 or higher**.
- For the operation of the 50S with a **firmware version lower than 2.0**, refer to the **50S Quick Start Guide (Version 1.0.1)**.

# QUICK START GUIDE

## Basic Operations

### Powering On



### Powering Off



### Volume Up



### Volume Down



## Checking the Battery Level

Instructions are for when powering the headset on.




### Visual Method







# QUICK START GUIDE

## Phone Pairing

1.  =  

Blinking  



*"Phone pairing"*

2. Select **50S** in the list of Bluetooth devices detected.



- For more information on phone pairing, refer to the User's Guide.

# QUICK START GUIDE

## Mobile Phone

Answer a Call



End a Call



or




Reject a call



## Siri and Google Assistant

Activate the Siri or Google Assistant Installed on Your Smartphone



or



# QUICK START GUIDE

## Music Controls

### Play/Pause



"[Beep, Beep]"

### Track forward




### Track backward



## Mesh Intercom™


When **Mesh Intercom** is enabled, the **50S** will automatically connect to nearby **50S** users and allow them to talk to each other by pressing the **Mesh Intercom Button**.

### Mesh Intercom On



"Mesh intercom on"

### Mesh Intercom Off



"Mesh intercom off"



# QUICK START GUIDE

## Open Mesh™


When **Mesh Intercom** is enabled, the headset will be in **Open Mesh (default: channel 1)** initially. Users can freely communicate with each other in the same **Open Mesh** channel.

## Channel Setting (Default: channel 1)

If the **Open Mesh** communication experiences interference because other groups are also using **channel 1 (default)**, change the channel. You can select from channels 1 to 9.

# QUICK START GUIDE

## Enter into the Channel Setting




"Channel setting, 1"



## Navigate between Channels

(1 → 2 → ... → 8 → 9 → Exit → 1 → ...)



"##"



## Save the Channel



"Channel is set, channel #"

**Note:** To exit the **Channel Setting**, rotate the **Jog Dial** clockwise or counterclockwise until you hear a voice prompt, **"Exit"**, and tap the **Jog Dial**.


# QUICK START GUIDE

## Group Mesh™

**Group Mesh** is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each headset. Up to 24 users can all be connected in each private group.

## Creating a Group Mesh

Creating a **Group Mesh** requires **two or more Open Mesh** users.



1. Enter into **Mesh Grouping** to create a **Group Mesh**.



YOU

and

=



FRIEND



"Mesh grouping"

# QUICK START GUIDE

2. The headsets complete **Mesh Grouping** and automatically switch from **Open Mesh** to **Group Mesh**.




"Group Mesh"

Open Mesh



Group Mesh




## Joining an Existing Group Mesh

One of the members in an **Existing Group Mesh** can allow new members in **Open Mesh** to join the **Existing Group Mesh**.

New Members



Existing Group Mesh  
and Current Members



# QUICK START GUIDE

1. **One of the current members** and a **new member** enter into **Mesh Grouping** to join the **Existing Group Mesh**.



YOU  
(NEW  
MEMBER)

and

=



CURRENT  
MEMBER  
IN GROUP  
MESH




*"Mesh grouping"*

2. The headsets complete **Mesh Grouping**. The new members will hear a voice prompt as their headsets automatically switch from **Open Mesh** to **Group Mesh**.



*"Group Mesh"*






# QUICK START GUIDE

## Reset Mesh


If a headset in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.



## Enable/Disable Mic (Default: Enable)

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.

### Enable/Disable the Microphone




## Bluetooth Intercom

Up to three other people can be paired with the headset for **Bluetooth intercom** conversations.

### Intercom Pairing




There are two ways to pair the headset.




# QUICK START GUIDE

## Using the Smart Intercom Pairing (SIP)

**SIP** allows you to quickly pair with your friends for intercom communication by scanning the QR code on the **SENA MOTORCYCLES App** without remembering the button operation.

1. Pair the mobile phone with the headset.
2. Open the **SENA MOTORCYCLES App** and tap  (**Smart Intercom Pairing Menu**).
3. Scan the **QR code** displayed on your friend (**B**)'s mobile phone.
  - Your friend (**B**) can display the QR code on the mobile phone by tapping  > **QR code** () on the **SENA MOTORCYCLES App**.



4. Tap **Save** and check that your friend (**B**) is paired with **you (A)** correctly.
5. Tap **Scan** () and repeat steps 3-4 to pair with **Intercom Friends (C)** and (**D**).

**Note:** The **Smart Intercom Pairing (SIP)** is not compatible with Sena products that use **Bluetooth 3.0** or **below**.

# QUICK START GUIDE

## Using the Button



and

=



*"Intercom pairing"*

The **50S** will automatically pair with a Sena headset.



=

Flashing blue LED confirms **intercoms are paired**.

LED  
STATUS

**Note:** Repeat the step above to pair with Intercom Friends C & D.

# QUICK START GUIDE

## Two-Way Intercom

### Last-Come, First-Served



### Start/End with Intercom Friend 1



### Start/End with Intercom Friend 2




### Start/End with Intercom Friend 3




# QUICK START GUIDE

## Ambient Mode



## FM Radio


### FM Radio On




### FM Radio Off



### Scan Stations



### Seek Stations



### Navigating Preset Stations



# QUICK START GUIDE

## Configuration Menu

Accessing the Headset Configuration Menu




"Configuration menu"

Navigating Between Menu Options



"[Menu prompt]"


Execute Menu Options




"[Menu prompt]"

## Troubleshooting

Factory Reset



























Fault Reset




















**Note:** Fault Reset will not restore the headset to factory default settings.

# QUICK REFERENCE















TYPE	OPERATION	BUTTON COMMANDS
 Basic Operations	Power on / Power off	     
	Volume up / Volume down	  or 
	Ambient Mode	 
 Mobile Phone	Answer phone call	 
	End phone call	 
	Reject phone call	 
	Speed dial	 
 Siri and Google Assistant	Activate the Siri or Google Assistant	 

# QUICK REFERENCE

TYPE	OPERATION	BUTTON COMMANDS
 Music	Play/Pause music	 
	Track forward	 
	Track backward	 
 FM Radio	FM radio on/off	 
	Select preset	 
	Seek forward/ backward	  or 
	Scan up FM band/ stop scanning	 



# QUICK REFERENCE

TYPE	OPERATION	BUTTON COMMANDS
 Mesh Intercom™	Mesh Intercom on/off	 
	Channel setting	 
	Mesh Grouping	 
	Reset Mesh	 
	Enable/Disable Mic	 
 Intercom	Intercom pairing	 
	Start/End intercom	