

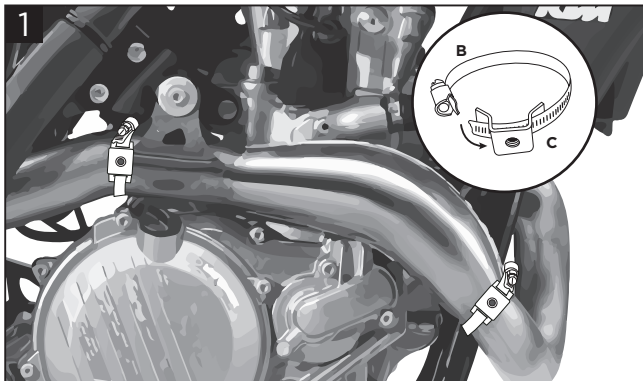


## X-EXHAUST PARACALORE X-EXHAUST


COD. 500007707 REV.1

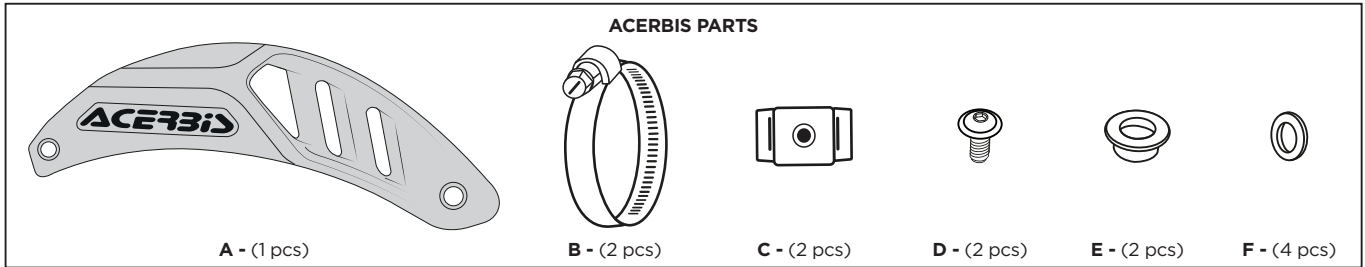

**Insert the threaded plates (C) into the hose clamps (B) and then attach to the muffler loosely.**  
Inserire la facetta (B) nella piastrina (C) e posizionare sulla marmitta. Stringere senza serrare completamente.

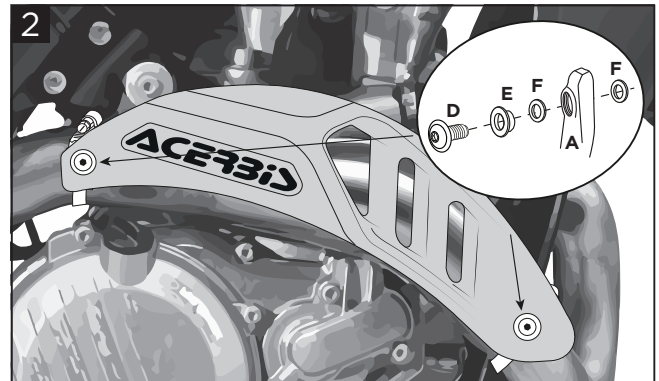


**Attach the head shield (A) with the supplied bolt (D), bushing (E) and washers (F) as shown in figure. Tighten loosely.**  
Fissare il paracalore (A) tramite le bocche (E), le rondelle (F) e le viti (D) in dotazione. Stringere senza serrare completamente.

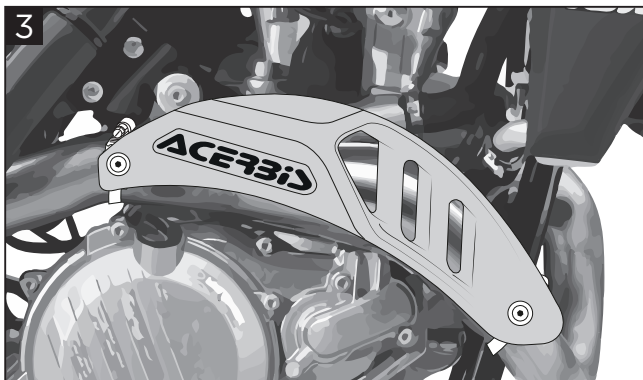

**Arrange the shield and clamps so that the shield is a minimum of 8 mm away from the exhaust pipe and tighten the clamps (B). Then tighten the head shield to the clamps and torque to 4Nm. After one hour of use, check the tightness of the clamps and shield and tighten if needed.**

Serrare completamente le fascette calcolando la corretta distanza del paracalore, minimo 8 mm dallo scarico, e di conseguenza stringere completamente le viti (4Nm). Dopo un'ora di utilizzo in moto, ricontrollare il serraggio delle viti (D) e delle fascette (B).

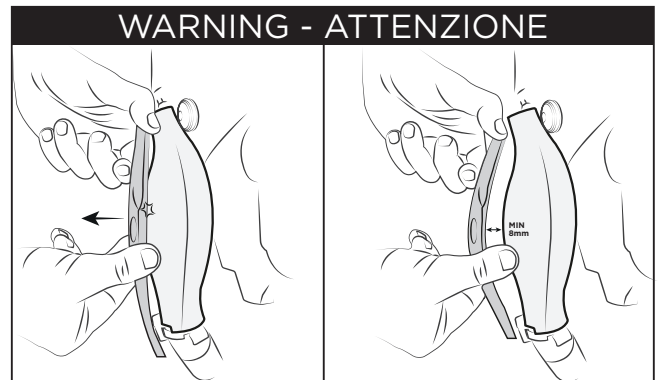

**If it's not possible to have a minimum distance from the exhaust pipe of 8mm, it is possible to deform the protection, tighten the clamps where the protection hole is aligned and then tighten the screw.**

Se non fosse possibile avere una distanza minima dello scarico di 8 mm, è possibile deformare la protezione, fissare la fascetta nel punto in cui si allinea al foro della protezione e stringere la vite.

### WARNING!

Use Acerbis' products at your own risk. Check the safety of your device before you ride. Be sure that you follow the instructions for installing the Acerbis' products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Not following these instructions and warnings could lead to interference with the controls, loss of control, and accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation. Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.

#### EUROPE

ACERBIS ITALIA S.P.A.  
VIA SERIO, 37  
24021 ALBINO (BG)  
ITALY

#### U.S.A.

ACERBIS U.S.A. INC.  
MAIL P.O. BOX 2030  
SUN VALLEY, ID 83353  
SHIP 110 LINDAY CIRCLE  
KETCHUM, ID 83340  
U.S.A.

#### UNITED KINGDOM

ACERBIS U.K LTD  
UNIT 2 LUTON ENTERPRISE PARK  
SUNDON PARK ROAD  
LUTON, BEDFORDSHIRE LU3 3GU  
GREAT BRITAIN